

Link do produktu: <https://skleprower.pl/rower-dh-mondraker-summum-r-fox-sram-gx-1x7-p-722.html>

ROWER DH MONDRAKER SUMMUM R FOX SRAM GX 1x7



Cena	17 499,00 zł
Cena poprzednia	28 999,00 zł
Dostępność	Dostępny
Czas wysyłki	3 dni
Producent	MONDRAKER
Rozmiar ramy	M

Opis produktu


Młodsza siostra SUMMUM CARBON ma ramę wykonaną z hydroformowanego aluminium 6061 i najnowocześniejsze technologie Mondraker: ALLOY STEALTH EVO, ZERO SUSPENSION SYSTEM i FORWARD GEOMETRY. Jego niesamowita lekkość w połączeniu z nowoczesną geometrią zapewnia oszałamiające prowadzenie. Do wyboru jest również wersja MX z 27,5-calowym kołem tylnym i 29-calowym przednim kołem. Możesz także pójść o krok dalej i otrzymać opcjonalny zestaw do zmiany geometrii, aby w pełni dostosować charakterystykę jazdy do własnych preferencji.

RAMA	Summum 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero suspension system, 200mm travel, Forward Geometry, alloy upper link with shock eyelet bearings, SuperBoost 12x157mm rear axle, 83mm BSA bottom bracket, MAX. capacity dual row Enduro bearings, HHG internal cable routing, ISCG 05. *Optional Geometry kit
DAMPER	Fox DHX2 Performance Elite, 225x70mm. Settings: low-speed compression, low-speed rebound, spring preload. Trunnion top mount, 30x8mm bottom bushings, ECC010 compression, M rebound. Spring rate: S size 400 lbs, M size 450 lbs, L/XL size 500 lbs
WIDELEC	Fox 40 29 Float FIT GRIP EVOL Performance, 203mm, air spring, 1-1/8" steerer tube, 20x110mm axle, offset 56mm. Settings: low-speed compression, low-speed rebound, air preload
STERY	Onoff Mercurium 1.5 ZS for 1-1/8" steerer tube, 41x30.15x7x45°x45°
MOSTEK	ACB sealed bearings, geometry kit cups, external diameter 56mm
KIEROWNICA	Onoff Krypton DH CNC Integrated FG, 25-30mm adjustable length, 31.8mm barbore, 6061 alloy, 2x6mm spacer
CHWYTY SZTYCA	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore
SIODEŁKO	Onoff Desert, 1lock-on, 135mm
HAMULCE	SDG Micro I-Beam SP-751 Alloy, diameter 31.6mm, length 300mm, micro-adjustment
KOŁA	SDG I-Fly 2.0 I-Beam, high-density PU foam, Cordura sides
OPONA	KLAMKA: Sram Code R, tool-free reach adjust ZACISK: Sram Code R, oversized 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads
MECHANIZM KORBOWY	OBRE CZ: e*thirteen LG1 Plus DH, IW29 29" Hookless, 6069 Welded Aluminum, 30mm internal width, tubeless ready, 32 spokes SZPRYCHY: e*thirteen custom Hive triple-buttet black steel, alloy nipples, nipple washers PIASTA PRZÓD: e*thirteen Boost 20x110mm, triple-sealed, fully machined aluminum, IS 6 bolts / PIASTA TYŁ: e*thirteen Superboost 12x157mm, triple-sealed, fully machined aluminum w/6-degree engagement, IS 6 bolts

SUPPORT
ŁAŃCUCH
TYLNA PRZERZUTKA
MANETKA
KASETA
WAGA
AKCESORIA

165mm, 34T, steel, X-SYNC
Sram DUB BSA, sealed bearings, 83mm
Sram PC1110 11s, Powerlock
Sram GX DH, 7s, medium cage, X-actuation 1:1
Sram trigger GX DH 7s, X-actuation 1:1
Sram PG 720 11-25T, 7s
17.9 kg
E.13 Vario Compact Upper Slider ,Alloy backplate ,DMB (Direct mount
Bashguard) Lower Slider 34-36t, ISCG 05 adjustable upper slider

Geometria

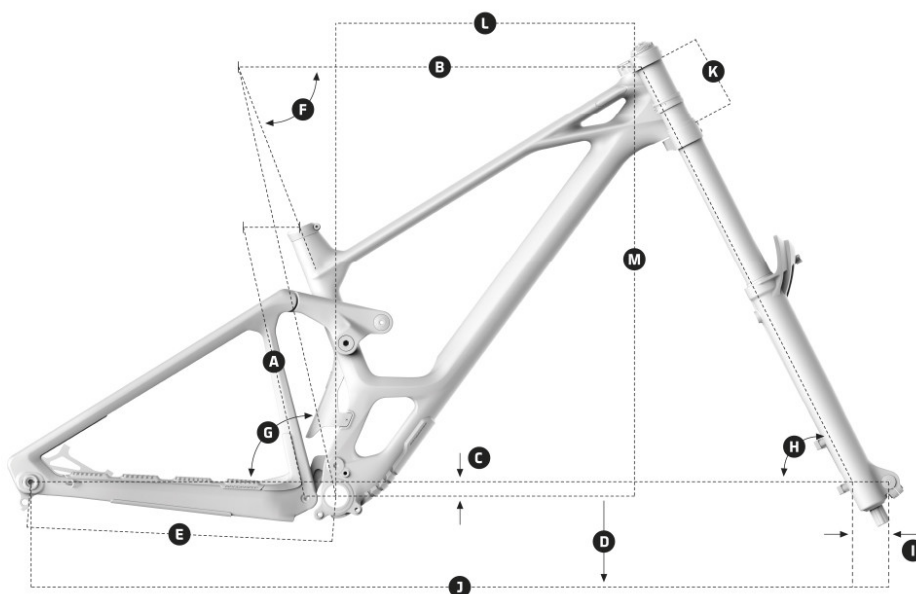

DOWNHILL SUMMUM

Size	S	M	L	XL
A Seat Tube Length	400 mm	400 mm	400 mm	400 mm
B Top Tube Length	573 mm	593 mm	618 mm	643 mm
C Bottom Bracket Drop	-20 mm	-20 mm	-20 mm	-20 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	450 mm	450 mm	450 mm	450 mm
F Seat Tube Angle, Actual	69°	69°	69°	69°
G Seat Tube Angle, Effective	77°	77°	77°	77°
H Head Tube Angle	63°	63,5°	63,5°	63,5°
I Fork Offset	58 mm	58 mm	58 mm	58 mm
J Wheelbase	1260 mm	1270 mm	1295 mm	1320 mm
K Head Tube Length	112 mm	112 mm	112 mm	112 mm
L Reach	430 mm	450 mm	475 mm	500 mm
M Stack	632 mm	632 mm	632 mm	632 mm