

Link do produktu: <https://skleprower.pl/rower-elektryczny-mondraker-chaser-29-bosh-cx-4-gen-smart-system-p-624.html>



# ROWER ELEKTRYCZNY MONDRAKER CHASER 29 BOSH CX 4 GEN SMART SYSTEM

|                 |                                         |
|-----------------|-----------------------------------------|
| Cena            | 18 499,00 zł                            |
| Cena poprzednia | 27 499,00 zł                            |
| Dostępność      | Dostępny                                |
| Czas wysyłki    | 3 dni                                   |
| Producent       | MONDRAKER                               |
| Rozmiar ramy    | S (38cm), M (42cm), L (45cm), XL (49cm) |
| Kolekcja        | 2023                                    |

## Opis produktu

CHASER to najlepsza opcja dla rowerzystów, którzy chcą uspokajającego debiutu w świecie elektrycznych rowerów górskich. Silnik Bosch Performance Line CX Smart System wraz z nowym bezprzewodowym pilotem Mini Remote firmy Bosch, zintegrowanym kontrolerem systemu i wyświetlaczem Intuvia 100 pozwalają cieszyć się bardzo naturalnym wspomaganie pedałowania z czterema różnymi poziomami wspomagania do wyboru. Jest wyposażony w wysokiej jakości rozwiązania, takie jak widelec RockShox 35 Silver TK i amortyzator RockShox Deluxe Select R, 12-biegowy układ napędowy SRAM SX Eagle; Koła Formula z oponami Maxxis Rekon o szerokości 2,6 cala; hamulce SRAM DB8 i komponenty ONOFF.

|                  |                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RAMA             | Chaser 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers, shock mudguard                   |
| WIDELEC          | RockShox 35 Silver TK 29, 160mm, TurnKey, Solo Air, tapered steerer tube, Boost 15x110mm axle, 35mm steel stanchions, 44mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload                                                                                                                                                                                    |
| TYLNY DAMPER     | RockShox Deluxe Select R Debonair, 205x65mm. Settings: Low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings                                                                                                                                                                                                                                                                |
| MOSTEK STERY     | Onoff Sulfur FG 30mm 0º, 6061 forged alloy, 31.8mm barbore                                                                                                                                                                                                                                                                                                                                        |
| KIEROWNICA       | Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45ºx45º, bottom 51.9x40x8x45ºx45º                                                                                                                                                                                                                                                                         |
| CHWYTY SZTYCA    | Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9º backsweep, 5º upsweep, 31.8mm barbore                                                                                                                                                                                                                                                                                     |
| SIODEŁKO HAMULCE | Onoff Twin, 1lock-on, 135mm                                                                                                                                                                                                                                                                                                                                                                       |
| KOŁA             | Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm<br>MDK ebike black<br>KLAMKI: Sram DB8, tool reach adjus, ZACISKI: Sram DB8, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads<br>OBRZĘCZ MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes / SZPRYCHY CN round stainless steel / PIASTY |
|                  | Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts / Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts                                                                                                                                                                                                                                                                           |


---

|                          |                                                                                                                                              |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>HAMULCE</b>           | Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead                                                      |
| <b>MECHANIZM KORBOWY</b> | Race Face Aeffect ebike, 165mm, Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD                                                         |
| <b>ŁAŃCUCH</b>           | Sram SX Eagle, 12s, Powerlock                                                                                                                |
| <b>TYLNA PRZERZUTKA</b>  | Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1                                                    |
| <b>MANETKA</b>           | Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click                                                                                    |
| <b>KASETA</b>            | Sram PG-1210, 11-50T, 12s                                                                                                                    |
| <b>WAGA</b>              | 25.2 kg                                                                                                                                      |
| <b>NAPĘD</b>             | SILNIK Bosch Performance Line CX (25km/h) Smart System /<br>BATERIA Bosch Powertube 625Wh / WYŚWIETLACZ Bosch Kiox 300 /<br>Bosch Led Remote |

Produkt posiada dodatkowe opcje:

**Rozmiar ramy:** S (38cm) , M (42cm) , L (45cm) , XL (49cm)

Geometria

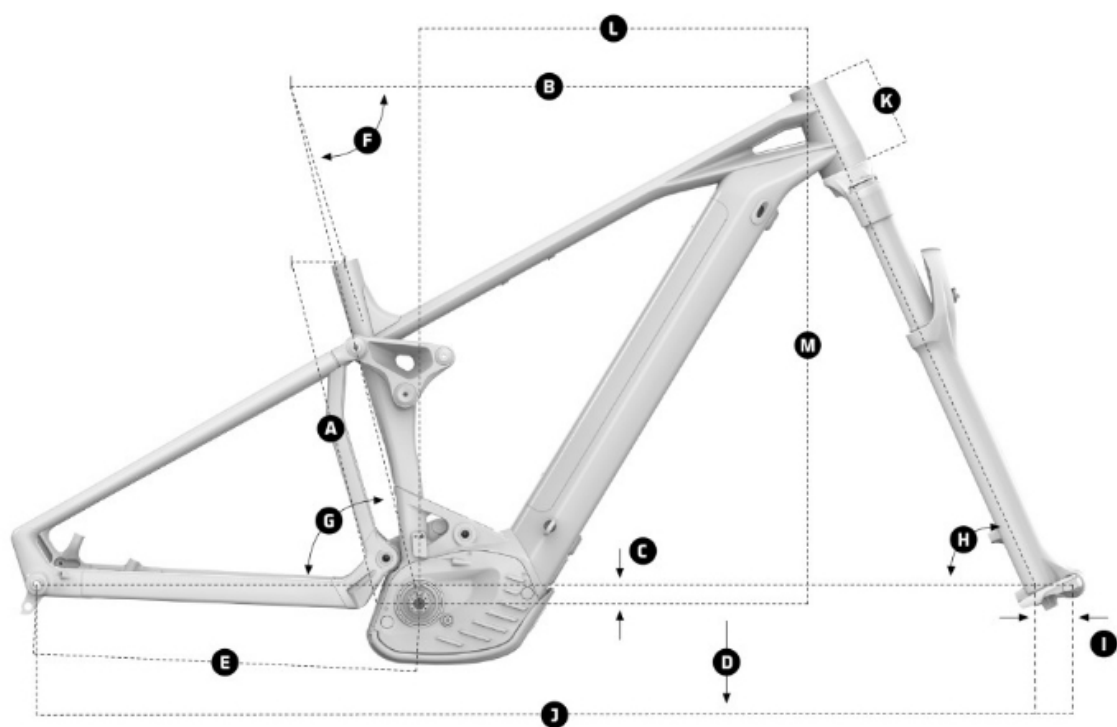

|   | FRAME SIZE               | S       | M       | L       | XL      |
|---|--------------------------|---------|---------|---------|---------|
| A | Seattube length          | 380 mm  | 420 mm  | 450 mm  | 490 mm  |
| B | Toptube length           | 605 mm  | 625 mm  | 650 mm  | 670 mm  |
| C | Bottom bracket drop      | -25     | -25mm   | -25 mm  | -25 mm  |
| D | Bottom bracket height    | 336 mm  | 336 mm  | 336 mm  | 336 mm  |
| E | Chainstay length         | 455 mm  | 455 mm  | 455 mm  | 445 mm  |
| F | Seat tube angle          | 73,5°   | 73,5°   | 73,5°   | 73,5°   |
| G | Effective seattube angle | 76°     | 76°     | 76°     | 76°     |
| H | Headtube angle           | 65,5°   | 65,5°   | 65,5°   | 65,5°   |
| I | Fork Offset              | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| J | Wheelbase                | 1225 mm | 1245 mm | 1265 mm | 1285 mm |
| K | Headtube length          | 110 mm  | 110mm   | 130 mm  | 130 mm  |
| L | Reach                    | 450 mm  | 470 mm  | 490 mm  | 510 mm  |
| M | Stack                    | 622 mm  | 622 mm  | 640 mm  | 640 mm  |

