

Link do produktu: <https://skleprower.pl/rower-elektryczny-mondraker-chaser-29-bosh-cx-4-gen-smart-system-p-656.html>



ROWER ELEKTRYCZNY MONDRAKER CHASER 29 BOSH CX 4 GEN SMART SYSTEM

Cena	18 499,00 zł
Cena poprzednia	27 499,00 zł
Dostępność	Dostępny
Czas wysyłki	3 dni
Producent	MONDRAKER
Rozmiar ramy	M (42cm), L (45cm), XL (49cm)
Kolekcja	2023

Opis produktu

CHASER to najlepsza opcja dla rowerzystów, którzy chcą uspokajającego debiutu w świecie elektrycznych rowerów górskich. Silnik Bosch Performance Line CX Smart System wraz z nowym bezprzewodowym pilotem Mini Remote firmy Bosch, zintegrowanym kontrolerem systemu i wyświetlaczem Intuvia 100 pozwalają cieszyć się bardzo naturalnym wspomaganie pedałowania z czterema różnymi poziomami wspomagania do wyboru. Jest wyposażony w wysokiej jakości rozwiązania, takie jak widelec RockShox 35 Silver TK i amortyzator RockShox Deluxe Select R, 12-biegowy układ napędowy SRAM SX Eagle; Koła Formula z oponami Maxxis Rekon o szerokości 2,6 cala; hamulce SRAM DB8 i komponenty ONOFF.


RAMA	Chaser 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers, shock mudguard
WIDELEC	RockShox 35 Silver TK 29, 160mm, TurnKey, Solo Air, tapered steerer tube, Boost 15x110mm axle, 35mm steel stanchions, 44mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload
TYLNY DAMPER	RockShox Deluxe Select R Debonair, 205x65mm. Settings: Low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
MOSTEK STERY	Onoff Sulfur FG 30mm 0º, 6061 forged alloy, 31.8mm barbore
KIEROWNICA	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45ºx45º, bottom 51.9x40x8x45ºx45º
CHWYTY SZTYCA	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9º backsweep, 5º upsweep, 31.8mm barbore
SIODEŁKO HAMULCE	Onoff Twin, 1lock-on, 135mm
KOŁA	Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm MDK ebike black KLAMKI: Sram DB8, tool reach adjus, ZACISKI: Sram DB8, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads OBRZĘCZ MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes / SZPRYCHY CN round stainless steel / PIASTY
	Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts / Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts

HAMULCE	Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
MECHANIZM KORBOWY	Race Face Aeffect ebike, 165mm, Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD
ŁAŃCUCH	Sram SX Eagle, 12s, Powerlock
TYLNA PRZERZUTKA	Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
MANETKA	Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click
KASETA	Sram PG-1210, 11-50T, 12s
WAGA	25.2 kg
NAPĘD	SILNIK Bosch Performance Line CX (25km/h) Smart System / BATERIA Bosch Powertube 625Wh / WYŚWIETLACZ Bosch Kiox 300 / Bosch Led Remote

Produkt posiada dodatkowe opcje:

Rozmiar ramy: M (42cm) , L (45cm) , XL (49cm)

Geometria

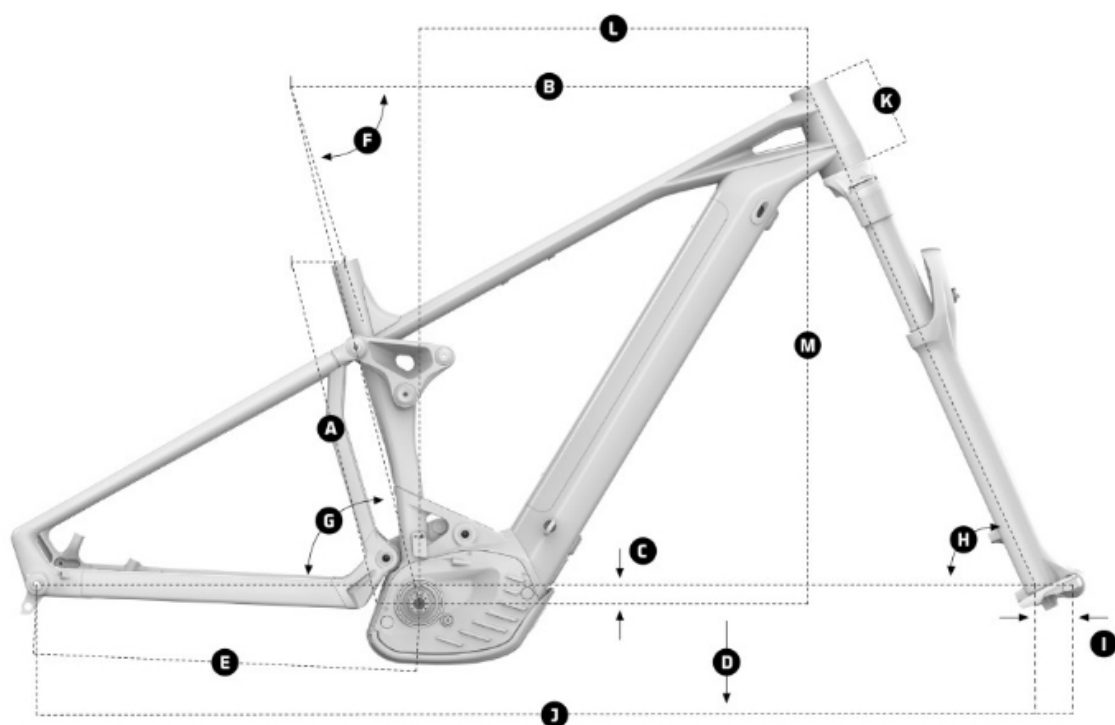

	FRAME SIZE	S	M	L	XL
A	Seattube length	380 mm	420 mm	450 mm	490 mm
B	Toptube length	605 mm	625 mm	650 mm	670 mm
C	Bottom bracket drop	-25	-25mm	-25 mm	-25 mm
D	Bottom bracket height	336 mm	336 mm	336 mm	336 mm
E	Chainstay length	455 mm	455 mm	455 mm	445 mm
F	Seat tube angle	73,5°	73,5°	73,5°	73,5°
G	Effective seattube angle	76°	76°	76°	76°
H	Headtube angle	65,5°	65,5°	65,5°	65,5°
I	Fork Offset	44 mm	44 mm	44 mm	44 mm
J	Wheelbase	1225 mm	1245 mm	1265 mm	1285 mm
K	Headtube length	110 mm	110mm	130 mm	130 mm
L	Reach	450 mm	470 mm	490 mm	510 mm
M	Stack	622 mm	622 mm	640 mm	640 mm

