

Link do produktu: <https://skleprower.pl/rower-elektryczny-mondraker-crafty-carbon-r-29-bosh-cx-4-gen-bateria-750-fox-38-p-616.html>



ROWER ELEKTRYCZNY MONDRAKER CRAFTY CARBON R 29 BOSH CX 4 GEN BATERIA 750 FOX 38

Cena	31 999,00 zł
Cena poprzednia	43 999,00 zł
Dostępność	Dostępny
Czas wysyłki	3 dni
Producent	MONDRAKER
Rozmiar ramy	M (42cm), L (45cm), XL (48cm)
Kolekcja	2023

Opis produktu

Po raz kolejny w 2023 roku CRAFTY CARBON R jest punktem odniesienia na rynku e-rowerów, zwłaszcza biorąc pod uwagę jego doskonały stosunek jakości do ceny. Zrównoważona wydajność pozwala Ci korzystać z naszych unikalnych technologii, aby skutecznie i płynnie pokonywać najbardziej techniczne szlaki. Silnik Bosch Smart System, bezprzewodowy mini pilot zdalnego sterowania, kontroler systemowy i akumulator 750 Wh w połączeniu ze skokiem 160 mm z przodu i 150 mm z tyłu zapewnia doskonałą amortyzację. Nowy CRAFTY CARBON R na rok 2023 pozwala ponownie zdefiniować swoje granice.

RAMA	Crafty Stealth Air full Carbon, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.
WIDELEC	Fox 38 29 Float FIT GRIP EVOL Performance, 160mm, e-bike tuned, tapered steerer tube, Boost 15x110mm axle, 44mm offset. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload
TYLNY DAMPER	Fox Float-X LV Performance, 205x65mm. Settings: compression 2 positions lever, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
MOSTEK STERY	Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare
KIEROWNICA	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
CHWYTY SZTYCA	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare
SIODEŁKO HAMULCE	Onoff Desert, 1lock-on, 135mm
KOŁA	Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm FIZIK Terra Aidon X5 145mm KLAMKI: Sram DB8, tool reach adjust, ZACISKI: Sram DB8, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads OBRZĘCZ: Mavic E-Deemax 29, 30mm internal width, welded, PFP, tubeless ready, 28 spokes / SZPRYCHY: Mavic J-bend duple butted, contactless lacing / PIASTY: Mavic, Boost 15x110mm, IS 6 bolts / Mavic,

OPONY

MECHANIZM KORBOWY

ŁAŃCUCH

TYLNA PRZERZUTKA

MANETKA

KASETA

WAGA

NAPĘD

Boost 12x148mm, ID360 Ratched system, IS 6 bolts

Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead / Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
Race Face Aeffect ebike, 165mm, Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD

Sram SX Eagle, 12s, Powerlock

SRAM GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

SRAM Trigger NX Eagle, 12s, X-Actuation 1:1, single click

Sram XG-1230, 11-50T, 12s


23.9 kg

SILNIK Bosch Performance Line CX Cruise (25Km/h) Bosch Smart System / BATERIA Bosch Powertube 750Wh / WYŚWIETLACZ Bosch Kiox 300 / Bosch Mini Remote / Bosch System Controller

Produkt posiada dodatkowe opcje:

Rozmiar ramy: M (42cm) , L (45cm) , XL (48cm)

Geometria

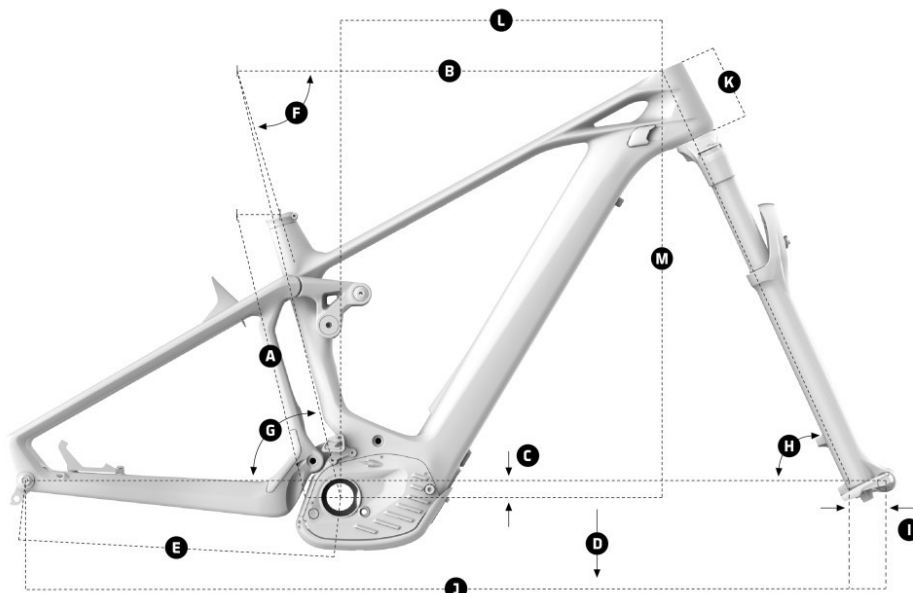

e-MTB ENDURO
CRAFTY CARBON

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	480 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1265 mm	1285 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm