

Link do produktu: <https://skleprower.pl/rower-elektryczny-mondraker-crafty-r-29-bosh-cx-4-gen-bateria-750-fox-38-p-667.html>



ROWER ELEKTRYCZNY MONDRAKER CRAFTY R 29 BOSH CX 4 GEN BATERIA 750 FOX 38

Cena	21 999,00 zł
Cena poprzednia	32 399,00 zł
Dostępność	Dostępny
Czas wysyłki	3 dni
Producent	MONDRAKER
Rozmiar ramy	S (38cm), M (42cm), L (45cm), XL (49cm)
Kolekcja	2023

Opis produktu

Dostępny w trzech różnych kolorach, CRAFTY R oparty na systemie zawieszenia ZERO SUSPENSION, który zapewnia super elastyczne działanie zawieszenia, a jednocześnie nie marnuje energii w tym procesie. To jeden z naszych priorytetów, jeśli chodzi o nasze rowery. Co więcej, rower jest naprawdę zwinny na szlaku, co jest bardzo potrzebne w eMTB. Wszystko to składa się na maksymalną zabawę i doskonały stosunek jakości do ceny. Jest dostarczany w komplecie z silnikiem Bosch Performance CX Line Smart Control, zupełnie nowym mini pilotem zdalnego sterowania i zintegrowanym kontrolerem systemowym. CRAFTY R to najbardziej konkurencyjny e-rower typu total enduro na rynku.

RAMA	Crafty 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.
WIDELEC	Fox 38 29 Float FIT GRIP EVOL Performance, 160mm, e-bike tuned, tapered steerer tube, Boost 15x110mm axle, 44mm offset. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload
TYLNY DAMPER	Fox Float-X LV Performance, 205x65mm. Settings: compression 2 positions lever, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
MOSTEK STERY	Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare
KIEROWNICA	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
CHWYTY SZTYCA	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare
SIODEŁKO HAMULCE	Onoff Desert, 1lock-on, 135mm
KOŁA	Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
	FIZIK Terra Aidon X5 145mm
	KLAMKI: Sram DB8, tool reach adjust, ZACISKI: Sram DB8, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
	OBRZĘCZ: Mavic E-Deemax 29, 30mm internal width, welded, PFP, tubeless ready, 28 spokes / SZPRYCHY: Mavic J-bend duple butted, contactless lacing / PIASTY: Mavic, Boost 15x110mm, IS 6 bolts / Mavic,

OPONY

MECHANIZM KORBOWY

ŁAŃCUCH

TYLNA PRZERZUTKA

MANETKA

KASETA

WAGA

NAPĘD

Boost 12x148mm, ID360 Ratched system, IS 6 bolts

Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead / Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
Race Face Aeffect ebike, 165mm, Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD

Sram SX Eagle, 12s, Powerlock

SRAM GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

SRAM Trigger NX Eagle, 12s, X-Actuation 1:1, single click

Sram PG-1210, 11-50T, 12s


25.6 kg

SILNIK Bosch Performance Line CX Cruise (25Km/h) Bosch Smart System / BATERIA Bosch Powertube 750Wh / WYŚWIETLACZ Bosch Kiox 300 / Bosch Mini Remote / Bosch System Controller

Produkt posiada dodatkowe opcje:

Rozmiar ramy: S (38cm) , M (42cm) , L (45cm) , XL (49cm)

Geometria

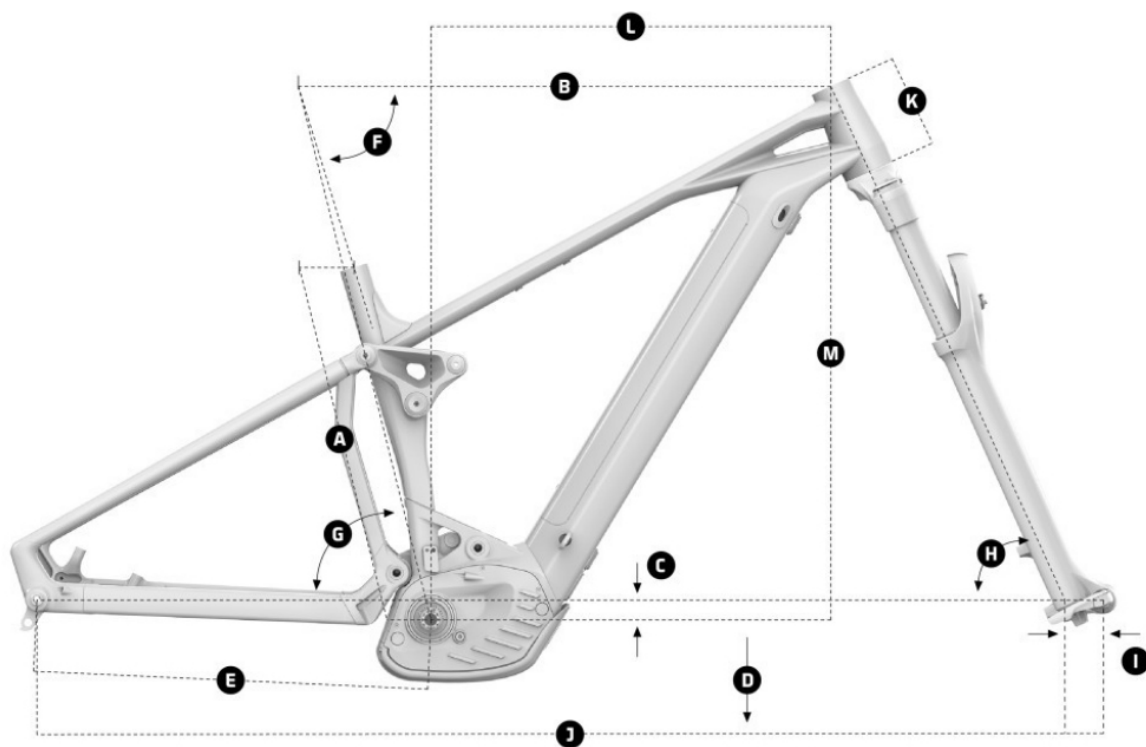

FRAME SIZE		S	M	L	XL
A	Seattube length	380mm	420mm	450mm	490mm
B	Toptube length	605mm	625mm	650mm	670mm
C	Bottom bracket drop	-25mm	-25mm	-25mm	-25mm
D	Bottom bracket height	350mm	350mm	350mm	350mm
E	Chainstay length	455mm	455mm	455mm	455mm
F	Seat tube angle	73.5°	73.5°	73.5°	73.5°
G	Effective seattube angle	76°	76°	76°	76°
H	Headtube angle	65.5°	65.5°	65.5°	65.5°
I	Fork Offset	44mm	44mm	44mm	44mm
J	Wheelbase	1225mm	1245mm	1265mm	1285mm
K	Headtube length	110mm	110mm	130mm	130mm
L	Reach	450mm	470mm	490mm	510mm
M	Stack	622mm	622mm	640mm	640mm