

Link do produktu: <https://skleprower.pl/rower-elektryczny-mondraker-crafty-rr-29-bosh-cx-4-gen-bateria-750-fox-38-kashima-p-851.html>



ROWER ELEKTRYCZNY MONDRAKER CRAFTY RR 29 BOSH CX 4 GEN BATERIA 750 FOX 38 KASHIMA

Cena	28 999,00 zł
Cena poprzednia	36 999,00 zł
Dostępność	Dostępny
Czas wysyłki	3 dni
Producent	MONDRAKER
Rozmiar ramy	L(45cm), XL (49cm)
Kolekcja	2024

Opis produktu

Wykorzystując w pełni zoptymalizowany system zawieszenia ZERO SUSPENSION, ten rower chłonie szlaki jak marzenie. Następnie dodaj FORWARD GEOMETRY i ramę STEALTH ALLOY EVO, aby uzyskać spektakularną zwinność i najprzyjemniejszą jazdę, jaką możesz sobie wyobrazić. Widelec Fox 38 wraz z amortyzatorem Fox Float X, oba z gamy Factory Kashima Coated, zapewniają niesamowitą kontrolę w każdej sytuacji i niezależnie od tego, jak trudne są warunki. Nie ma wątpliwości, że ulepszenia CRAFTY RR sprawiają, że poczujesz się jak profesjonalista.

RAMA	Crafty 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.
WIDELEC	Fox 38 29 Float GRIP2 Factory Kashima, 160mm, e-bike tuned, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high and low-speed compression, high and low-speed rebound, air preload
TYLNY DAMPER	Fox Float-X LV Factory Kashima, 205x65mm. Settings: compression 2 positions lever, low-speed compression, low-speed rebound, air preload.
MOSTEK STERY	Trunnion top mount, 25x10mm bottom bushings Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore
KIEROWNICA	Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45° Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbore
CHWYTY SZTYCA	Onoff Desert, 1lock-on, 135mm
SIODEŁKO HAMULCE	Fox Transfer Factory Kashima internal, diameter 31.6mm, S size: 363.5x125mm, M/L size: 418.3x150mm, XL size: 475.1x175mm FIZIK Terra Aidon X5 145mm
KOŁA	KLAMKI: Sram Code Bronze Stealth, SwingLink and lever pivot bushings, tool-free reach adjust / ZACISKI: Sram Code Bronze, oversized 4-piston caliper, Centerline 220/200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads OBRZĘCZ: Mavic E-Deemax 29, 30mm internal width, welded, PFP, tubeless ready, 28 spokes / SZPRYCHY: Mavic J-bend duple butted, contactless lacing / PIASTY: Mavic, Boost 15x110mm, IS 6 bolts / Mavic, Boost 12x148mm, ID360 Ratched system, IS 6 bolts

OPONY

MECHANIZM KORBOWY

ŁAŃCUCH

TYLNA PRZERZUTKA

MANETKA

KASETA

WAGA

NAPĘD

Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead / Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
Race Face Aeffect ebike, 165mm, Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD

Sram NX Eagle, 12s, Powerlock

SRAM GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

Sram Trigger GX Eagle, 12s, X-Actuation 1:1, single click

Sram XG-1230, 11-50T, 12s


25.9 kg

SILNIK Bosch Performance Line CX Cruise (25Km/h) Bosch Smart System / BATERIA Bosch Powertube 750Wh / WYŚWIETLACZ Bosch Kiox 500 / Bosch Mini Remote / Bosch System Controller

Produkt posiada dodatkowe opcje:

Rozmiar ramy: L (45cm) , XL (49cm)

Geometria

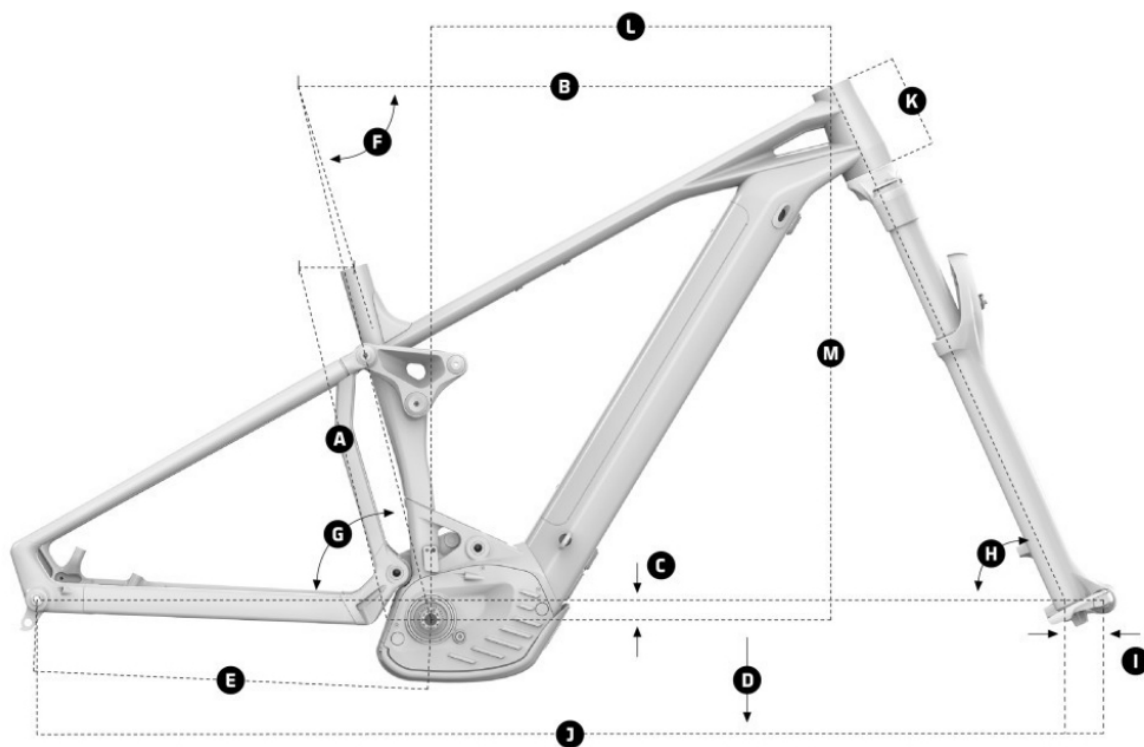

	FRAME SIZE	S	M	L	XL
A	Seattube length	380mm	420mm	450mm	490mm
B	Toptube length	605mm	625mm	650mm	670mm
C	Bottom bracket drop	-25mm	-25mm	-25mm	-25mm
D	Bottom bracket height	350mm	350mm	350mm	350mm
E	Chainstay length	455mm	455mm	455mm	455mm
F	Seat tube angle	73.5°	73.5°	73.5°	73.5°
G	Effective seattube angle	76°	76°	76°	76°
H	Headtube angle	65.5°	65.5°	65.5°	65.5°
I	Fork Offset	44mm	44mm	44mm	44mm
J	Wheelbase	1225mm	1245mm	1265mm	1285mm
K	Headtube length	110mm	110mm	130mm	130mm
L	Reach	450mm	470mm	490mm	510mm
M	Stack	622mm	622mm	640mm	640mm