

Link do produktu: <https://skleprower.pl/rower-elektryczny-mondraker-crafty-xr-29-bosh-cx-4-gen-bateria-750-hlins-p-668.html>



ROWER ELEKTRYCZNY MONDRAKER CRAFTY XR 29 BOSH CX 4 GEN BATERIA 750 ÖHLINS

Cena	28 499,00 zł
Cena poprzednia	42 499,00 zł
Dostępność	Dostępny
Czas wysyłki	3 dni
Producent	MONDRAKER
Rozmiar ramy	M (42cm), L (45cm)
Kolekcja	2023

Opis produktu

CRAFTY XR to najradośniejszy eMTB super enduro z aluminiową ramą w swojej klasie. Za zawieszenie odpowiadają Öhlins, renomowani szwedzcy eksperci od zawiesznień, oferując skok 170 mm z przodu i 150 mm z tyłu, oba doskonale dopasowane do ulepszanego silnika Bosch Performance Line CX Smart System oraz całkowicie nowego kontrolera systemu i pilota Bluetooth Mini. Jest rzeczą oczywistą, że będziesz korzystać z naszych wiodących w branży technologii, takich jak FORWARD GEOMETRY, ZERO SUSPENSION SYSTEM i STEALTH ALLOY EVO. CRAFTY XR to idealny wybór, jeśli szukasz e-MTB enduro z aluminiową ramą i bez kompromisów. Silnik Bosch Smart System ze wszystkimi ulepszeniami na rok 2023 w połączeniu z akumulatorem 750 Wh daje nieograniczone możliwości cieszenia się Crafty XR.

RAMA	Crafty 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.
WIDELEC	Öhlins RXF 38 M.2 29, 170mm, TTX18 Twin Tube cartridge, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload, ramp chamber
TYLNY DAMPER	Öhlins TTX Air 205X65mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
MOSTEK STERY	Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
KIEROWNICA	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5° upsweep, 31.8mm barbare
CHWYTY SZTYCA	Onoff Desert, 1lock-on, 135mm Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
SIODEŁKO HAMULCE	FIZIK Terra Aidon X5 145mm
KOŁA	KLAMKI: Sram Code R, tool-free reach adjust ZACISKI: Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads OBRZĘCZ: Mavic E-Deemax S 29, 30mm internal width, Maxtal welded, PFP, tubeless, 28 spokes / SZPRYCHY: Mavic J-bend double butted, contactless lacing / PIASTY: Mavic, Boost 15x110mm, IS 6 bolts / Mavic,

OPONY

MECHANIZM KORBOWY

ŁAŃCUCH

TYLNA PRZERZUTKA

MANETKA

KASETA

WAGA


NAPĘD

Boost 12x148mm, ID360 Ratched system, IS 6 bolts
Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead / Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead
Race Face Aeffect ebike, 165mm, Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD
Sram NX Eagle, 12s, Powerlock
SRAM GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
Sram Trigger GX Eagle, 12s, X-Actuation 1:1, single click
Sram XG-1275, 10-52T, 12s
25,0 kg
SILNIK Bosch Performance Line CX Cruise (25Km/h) Bosch Smart System / BATERIA Bosch Powertube 750Wh / WYŚWIETLACZ Bosch Kiox 300 / Bosch Mini Remote / Bosch System Controller

Produkt posiada dodatkowe opcje:

Rozmiar ramy: M (42cm) , L (45cm)

Geometria

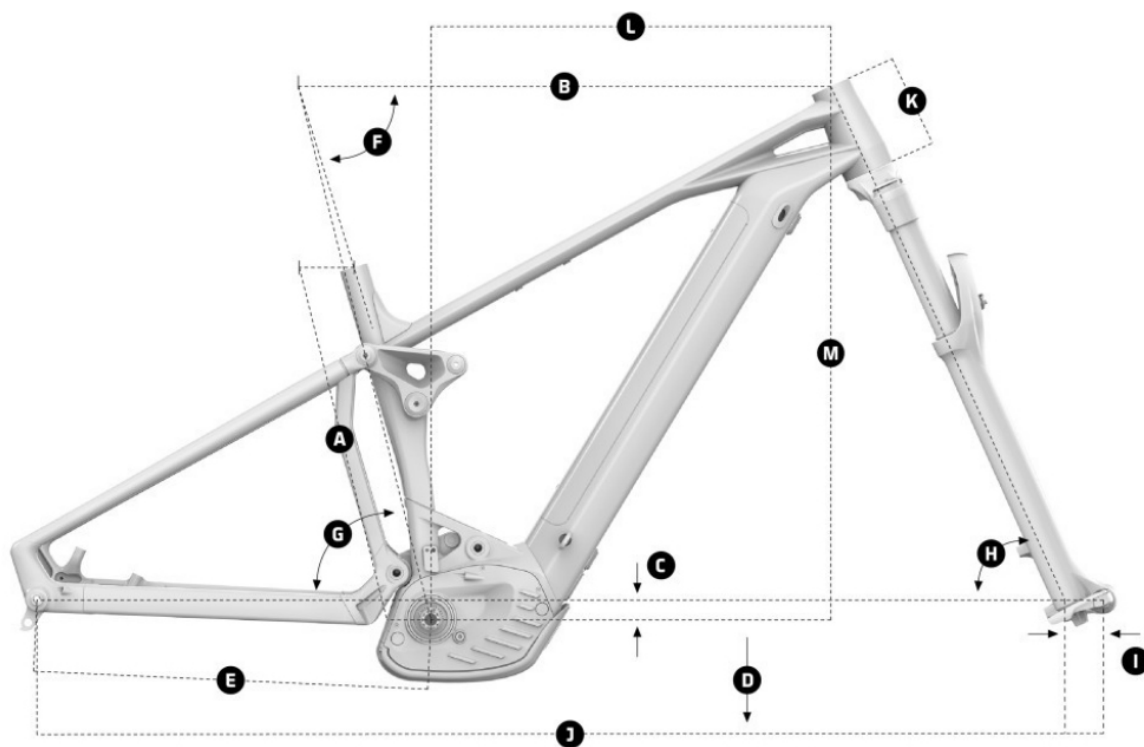

FRAME SIZE		S	M	L	XL
A	Seattube length	380mm	420mm	450mm	490mm
B	Toptube length	605mm	625mm	650mm	670mm
C	Bottom bracket drop	-25mm	-25mm	-25mm	-25mm
D	Bottom bracket height	350mm	350mm	350mm	350mm
E	Chainstay length	455mm	455mm	455mm	455mm
F	Seat tube angle	73.5°	73.5°	73.5°	73.5°
G	Effective seattube angle	76°	76°	76°	76°
H	Headtube angle	65.5°	65.5°	65.5°	65.5°
I	Fork Offset	44mm	44mm	44mm	44mm
J	Wheelbase	1225mm	1245mm	1265mm	1285mm
K	Headtube length	110mm	110mm	130mm	130mm
L	Reach	450mm	470mm	490mm	510mm
M	Stack	622mm	622mm	640mm	640mm