

Link do produktu: <https://skleprower.pl/rower-mondraker-chrono-29er-sram-sx-eagle-1x12-x-fusion-rc32-p-535.html>



ROWER MONDRAKER CHRONO 29er SRAM SX EAGLE 1X12 X-FUSION RC32

Cena	4 999,00 zł
Cena poprzednia	6 699,00 zł
Dostępność	Dostępny
Czas wysyłki	3 dni
Producent	MONDRAKER
Rozmiar ramy	M (43cm)
Kolekcja	2022

Opis produktu


CHRONO TO PRZED W SZYSTKIM DYNAMICZNY ROWER. Jego rama jest wykonana z cieniowanego stopu 6061 Xtralite i ma naszą XC FORWARD GEOMETRY, która zapewni Ci optymalną pozycję do efektywnego pedałowania, jednocześnie oferując stabilność i pewność podczas zjazdów. To najtańszy rower w gamie Chrono, ale nadal daje Ci całą naszą ponad 20-letnią wiedzę w produkcji motocykli pierwszej klasy, co oznacza, że możesz cieszyć się naszym wyścigowym DNA za każdym razem, gdy go wyciągasz.

RAMA	Chrono 29 6061 Xtralite Alloy butted, XC Forward Geometry, 73mm BSA bottom bracket, tapered head tube, HHG Internal Cable Routing, Boost 12x148mm rear axle
WIDELEC	X-Fusion RC32 29, 100mm, air spring, tapered steerer tube, Boost 15x110mm axle, 32mm aluminum stanchions, offset 51mm. Settings: 2 pos remote compression (open/lock), rebound, air preload, X-Fusion RC Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
STERY	MDK-XP1 29 TLR, 25mm internal width, tubeless ready, 32 spokes
OBRĘCZE PIASTY	Front : Formula 15x110mm, cup & cone ball bearings, IS 6 bolts, Rear: Formula MST148S-4SB, Boost 12x148mm, sealed bearings, IS 6 bolts
SZPRYCHY OPONY MOSTEK	CN round stainless steel
KIEROWNICA	Maxxis Ikon 29x2.20, 60TPI, wire bead
SZTYCA	Onoff Sulfur, 6061 T6 Alloy, 31.8mm barbare, rise: +/-7°, length: sizes S/M: 60mm, size L: 80mm, size XL: 90mm
SIODEŁKO HAMULCE	Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 740mm, 9° backsweep, 0° upsweep, 31.8mm barbare
MANETKI PRZEDNIA PRZERZUTKA TYLNA PRZERZUTKA	Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm
KASETA MECHANIZM KORBOWY	Mondraker XC Series, steel rail
SUPPORT PEDAŁA ŁAŃCUCH	KLAMKA: Sram Level TL, Direct Link actuation, tooled reach adjust, lever pivot bushings, ZACISK Sram Level TL, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad
	Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click
	BRAK
	Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
	Sram PG-1230, 11-50T, 12s
	Sram SX Eagle, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm, 34T, steel, X-Sync 2
	Sram DUB BSA, sealed bearings, 73mm
	BRAK
	Sram SX Eagle, 12s, Powerlock

CHWYTY
WAGA

Onoff Twin, 1lock-on, 135mm
12.7kg

Geometria

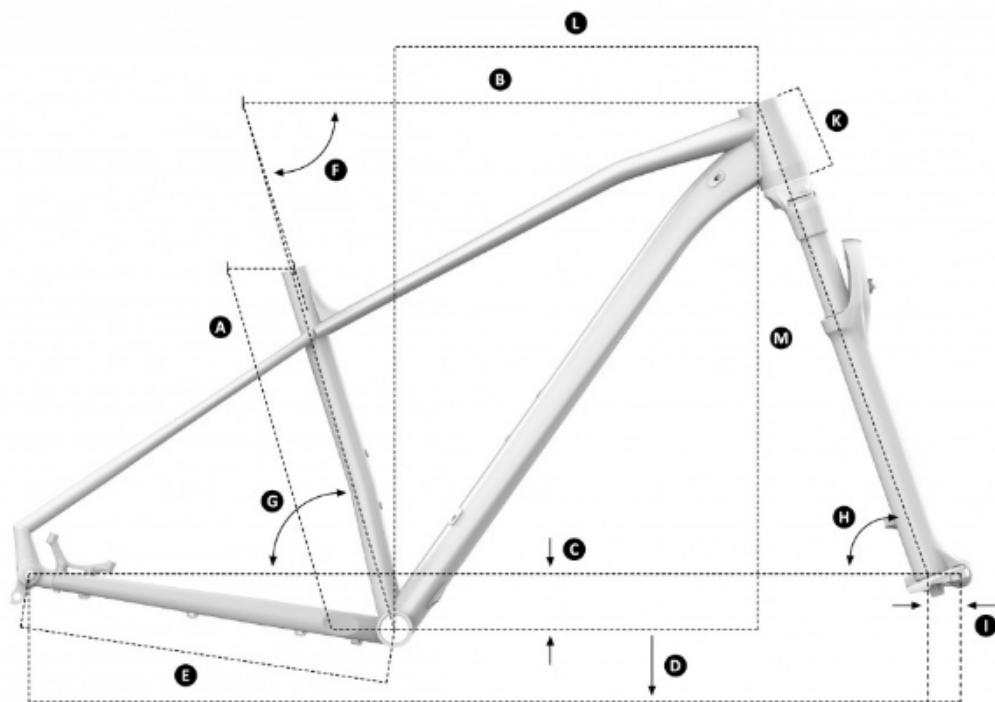

FRAME SIZE		S	M	L	XL
A	Seat Tube Lenght	395mm	430mm	470mm	520mm
B	Top Tube Lenght	590mm	610mm	630mm	650mm
C	Bottom Bracket Drop	-65mm	-65mm	-65mm	-65mm
D	Bottom Bracket Height	305mm	305mm	305mm	305mm
E	Chainstay Lenght	430mm	430mm	430mm	430mm
F	Seat Tube Angle, Actual	72°	72°	72°	72°
G	Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°
H	Head Tube Angle	70°	70°	70°	70°
I	Fork Offset	46mm	46mm	46mm	46mm
J	Wheelbase	1081mm	1101mm	1122mm	1143mm
K	Head Tube Lenght	85mm	90mm	100mm	115mm
L	Reach	411mm	430mm	447mm	463mm
M	Stack	605mm	610mm	619mm	632mm

