

Link do produktu: <https://skleprower.pl/rower-mondraker-f-podium-r-29er-2023-sram-x01-eagle-1x12-fox-kashima-p-615.html>



ROWER MONDRAKER F-PODIUM R 29er 2023 SRAM X01 EAGLE 1X12 FOX KASHIMA

Cena	22 999,00 zł
Cena poprzednia	35 799,00 zł
Dostępność	Dostępny
Czas wysyłki	3 dni
Producent	MONDRAKER
Rozmiar ramy	M (42cm), L (47 cm), XL (51cm)
Kolekcja	2023

Opis produktu

Czyste przyspieszenie. F-PODIUM R to uosobienie roweru cross country z pełnym zawieszeniem. Dzięki 100 mm skoku tylnego koła i 110 mm z przodu pedałuje z wydajnością hardtaila, ale jeśli chodzi o zjazdy, masz odpowiednią amortyzację. Trakcja jest jego wizytówką dzięki SYSTEMOWI ZERO SUSPENSION. Jeśli dodamy do systemu ZERO SUSPENSION naszą technologię FORWARD GEOMETRY i ramę wykonaną ze STEALTH AIR FULL CARBON, otrzymamy rower XC w połowie drogi między F-PODIUM DC startującym w Pucharze Świata, a PODIUM który jest naszym najwyższej klasy hardtailem.

RAMA	F-Podium Stealth Air Full Carbon, XCO Optimized Zero Suspension System, 100mm, XC Forward Geometry, Carbon Monoblock upper link, BSA bottom bracket, tapered head tube, HHG internal cable routing, dedicated 1X drivetrain design, Boost 12x148mm rear axle, shock mudguard, postmount rear brake mount.
DAMPER	Fox Float DPS SV EVOL Factory Kashima, 185x47,5mm. Settings: 2 position remote compression (open/lock), low-speed rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings
WIDELEC	Fox 34 Step Cast Float FIT4 Evol Factory Kashima, 110mm, tapered steerer tube, 15x110mm Boost axle, offset 44mm. Settings: remote 2pos Push-unlock, compression micro-adjustment at low-speed, rebound, air preload
STERY OBRĘCZE	Acros AZX-239 R1 Block Lock, ZS44/28.6 top, ZS56/40 bottom
PIASTY	Mavic Crossmax Carbon XL R 29, 30mm internal width, hookless, tubeless ready, 24 spokes
SZPRYCHY OPONY	FRONT: Mavic, Boost 15x110mm, IS 6 bolts, REAR: Mavic, Boost 12x148mm, ID360 Ratched system, IS 6 bolts, XD freehub
MOSTEK	Mavic straightpull double butted, contactless lacing
KIEROWNICA	Maxxis Rekon Race 29x2.35, EXO protection, tubeless ready, 120TPI, folding bead
SZTYCA SIODEŁKO HAMULCE	MDK, 6061 T6 Alloy, 31.8mm barbare, rise: +/-5°, length: sizes S/M: 50mm, size L: 60mm, size XL: 70mm
MANETKI PRZEDNIA PRZERZUTKA TYLNA PRZERZUTKA	ONOFF Helium Carbon 0.2, rise: 4.8mm, width: 760mm, 9° backsweep, 0° upsweep, 31.8mm barbare
	ONOFF Helium Carbon 0-R, diameter 31.6mm, length 400mm
	Fizik Antares R7
	KLAMKI: SRAM Level TL, Direct Link actuation, tooled reach adjust, lever pivot bushings, ZACISK: SRAM Level TL, 2 piece caliper, Centerline 180/160mm IS 6 bolts one-piece rotor, steel-backed organic pad
	SRAM Trigger GX Eagle, 12s, X-Actuation 1:1
	BRAK
	SRAM X01 Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

KASETA
MECHANIZM KORBOWY


SUPPORT
PEDAŁY
ŁAŃCUCH
CHWYTY
WAGA

SRAM XG-1275, 10-50T, 12s
SRAM X1 Carbon Eagle, Boost, DUB axle, Direct mount chain ring, S size: 170mm, M/L/XL size: 175mm, 34T, CNC-machined alloy, X-SYNC 2
Sram DUB PF30, sealed bearings, 73mm
BRAK
SRAM GX Eagle, 12s, Powerlock
ONOFF Desert, 1lock-on, 135mm
11,2 KG

Produkt posiada dodatkowe opcje:

Rozmiar ramy: M (42cm) , L (47 cm) , XL (51cm)

Geometria

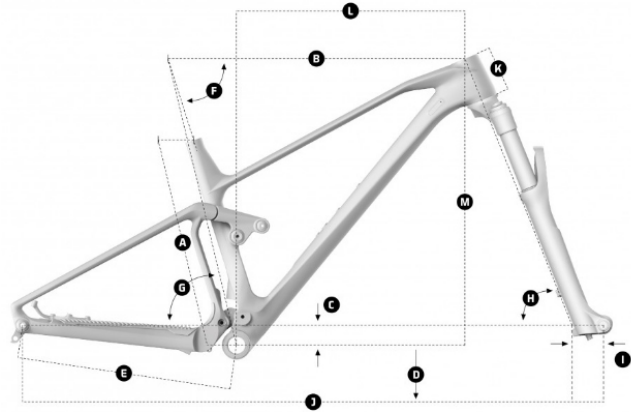

FRAME SIZE		S	M	L	XL
A	Seat Tube Lenght	390 mm	420 mm	470 mm	510 mm
B	Top Tube Lenght	580 mm	600mm	625 mm	650 mm
C	Bottom Bracket Drop	-40	-40	-40	-40
D	Bottom Bracket Height	325 mm	325 mm	325 mm	325 mm
E	Chainstay Lenght	432 mm	432 mm	432 mm	432 mm
F	Seat Tube Angle, Actual	72°	72°	72°	72°
G	Seat Tube Angle, Effective	76.5°	76.5°	76.5°	76.5°
H	Head Tube Angle	68°	68°	68°	68°
I	Fork Offset	44 mm	44 mm	44 mm	44 mm
J	Wheelbase	1132 mm	1153 mm	1177 mm	1203 mm
K	Head Tube Lenght	85 mm	90 mm	100 mm	115 mm
L	Reach	440 mm	460 mm	480 mm	500 mm
M	Stack	570 mm	575 mm	584 mm	598 mm