

Link do produktu: <https://skleprower.pl/rower-mondraker-foxy-29-2023-sram-1x12-fox-36-p-608.html>



ROWER MONDRAKER FOXY 29 2023 SRAM 1x12 FOX 36

Cena	11 999,00 zł
Cena poprzednia	19 099,00 zł
Dostępność	Dostępny
Czas wysyłki	3 dni
Producent	MONDRAKER
Rozmiar ramy	S (38cm), M (42cm), L (47cm), XL (51cm)
Kolekcja	2022

Opis produktu

FOXY to jeden z naszych najlepiej sprzedających się rowerów. Dzięki aluminiowej ramie 6061 STEALTH EVO możesz cieszyć się tymi samymi ekskluzywnymi i prestiżowymi technologiami, które można znaleźć w naszych innych FOXY, takimi jak FORWARD GEOMETRY i ZERO SUSPENSION SYSTEM. Dodając do tego doskonały stosunek jakości do ceny, jest mocnym kandydatem na rower enduro sezonu. Zmontowany z niezawodnych komponentów, jest dostarczany seryjnie z zawieszeniem Fox, przekładnią SRAM SX Eagle, kołami e*thirteen LG1 Plus Enduro, hamulcami SRAM G2 R i komponentami ONOFF. Skok wynosi 160 mm z przodu i 150 mm z tyłu.

RAMA

DAMPER

WIDELEC

STERY

MOSTEK KIEROWNICA

CHWYTY SZTYCA

SIODEŁKO HAMULCE

KOŁA

OPONA

Foxy 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 150mm travel, Forward Geometry, one piece Monoblock upper link, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, telescopic seatpost internal routing, MAX capacity sealed bearings, ISCG 05
Fox Float DPS LV EVOL Performance, 205x62.5mm. Settings: rebound, 3-position compression adjustment (Open/Mid/Lock), air preload. Trunnion top mount, 22.2x10mm bottom bushings
Fox 36 29 Float FIT GRIP EVOL Rhythm, 160mm, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: sweep adjust compression, low-speed rebound, air preload
ONOFF Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
ONOFF Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore
ONOFF Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore
ONOFF Twin, 1lock-on, 135mm
ONOFF Pija dropper internal, diameter 31.6mm, S size: 337x100mm, M size 387x125mm, L size: 425x150mm, XL size: 465x170mm
SDG BEL-AIR 3.0, LPU foam, steel rails
KLAMKA: Sram G2 R, SwingLink, tool-free reach adjust ZACISK: Sram G2 R, 4-piston caliper, Centerline 200mm/180mm IS 6 bolts one-piece rotor, steel-backed organic pads
OBRĘCZ: e*thirteen LG1 Enduro, IW30 Hookless, 6069 Welded Aluminum, 30mm internal width, tubeless ready, 28 spokes SZPRZYCHY: e*thirteen custom Hive triple-buttet black steel, alloy nipples, nipple washers PIASTA PRZÓD: e*thirteen Boost 15x110mm, triple-sealed, fully machined aluminum, IS 6 bolts / PIASTA TYŁ: e*thirteen Boost 12x148mm, triple-sealed, fully machined aluminum w/6-degree engagement, IS 6 bolts, Shimano freehub PRZÓD: Maxxis Minion DHF 29x2.5 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead / TYŁ: Maxxis Aggressor 29x2.3, tubeless ready, dual compound, Exo protection,

MECHANIZM KORBOWY

SUPPORT

ŁAŃCUCH

TYLNA PRZERZUTKA

MANETKA

KASETA


WAGA

60TPI, folding bead
Sram SX Eagle, Boost, DUB axle, Direct Mount chain ring, S/M size: 170mm, L/XL size: 175mm, 32T, CNC-machined alloy, X-SYNC 2
SRAM DUB BSA, sealed bearings, 73mm
SRAM SX Eagle, 12s, Powerlock
SRAM SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
SRAM Trigger SX Eagle, 12s, X-Actuation 1:1
SRAM PG-1210, 11-50T, 12s
15.6 kg

Produkt posiada dodatkowe opcje:

Rozmiar ramy: S (38cm) , M (42cm) , L (47cm) , XL (51cm)

Geometria

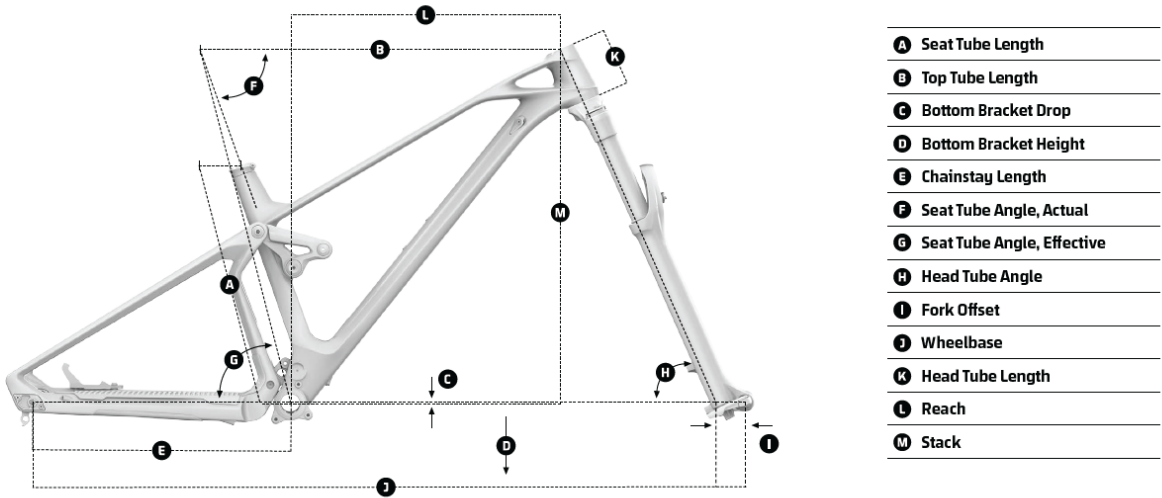

ENDURO FOXY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	470 mm	510 mm
B Top Tube Length	606 mm	629 mm	654 mm	678 mm
C Bottom Bracket Drop	-21 mm	-21 mm	-21 mm	-21 mm
D Bottom Bracket Height	355 mm	355 mm	355 mm	355 mm
E Chainstay Legth	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	71°	71°	71°	71°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	66°	66°	66°	66°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1193 mm	1222 mm	1248 mm	1274 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	450 mm	475 mm	495 mm	515 mm
M Stack	606 mm	615 mm	630 mm	643 mm