

Link do produktu: <https://skleprower.pl/rower-mondraker-foxy-carbon-r-29-2022-sram-1x12-fox-36-p-516.html>



ROWER MONDRAKER FOXY CARBON R 29 2022 SRAM 1x12 FOX 36

Cena	18 999,00 zł
Cena poprzednia	29 499,00 zł
Dostępność	Dostępny
Czas wysyłki	3 dni
Producent	MONDRAKER
Rozmiar ramy	M (415 mm), L (445mm)
Kolekcja	2022

Opis produktu

OSZCZĘDNOŚĆ MASY MOŻE NIE WYDAĆ SIĘ PIERWSZYM PRIORYTETEM, GDY UDERZASZ NA NAJWIĘKSZE LINIE I NAJTRUDNIEJSZE ZJAZDY POZA WYZNACZONYMI TRASAMI, ALE W MONDRAKER Z DUMĄ ZAWSZE CIESZYMY SIĘ INNYM MYŚLENIEM.

Nasza nowa rama Foxy Stealth Air Full Carbon wykorzystuje nasze DNA z Downhill World Cup, aby umożliwić szybsze przyspieszanie, dalsze skoki i płynniejsze lądowanie bez utraty siły i kontroli. Niewielka waga oznacza oczywiście, że możesz przeładować siłę grawitacji i maksymalnie zwiększyć współczynnik uśmiechu. Dzięki naszej charakterystycznej geometrii Forward i zawieszeniu Zero SUSPENSION, wzmocnionego widelcem Fox 36, oraz damperem Fox Float-X LV Performance, i miażdżącymi w górach hamulcami 4 tłoczkowymi SRAM G2 przekładnia Eagle, zestawem gotowych kół DT Swiss i oponami premium Maxxis Minion 3C EXO +.

RAMA	Foxy 29 Stealth Air full Carbon, Zero Suspension System, 150mm travel, Forward Geometry, Carbon Monoblock upper link, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, HHG internal cable routing, Enduro MAX sealed bearings, shock mudguard, ISCG 05, custom frame protectors. *Geometry kit included
DAMPER	Fox Float-X LV Performance, 205x65mm. Settings: compression 2 positions lever, low-speed rebound, air preload. Trunnion top mount, 30x8mm bottom bushings
WIDELC	Fox 36 29 Float FIT GRIP EVOL Rhythm, 160mm, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: sweep adjust compression, low-speed rebound, air preload
STERY	Acros custom for 1-1/2" head tube, angular contact bearings 40x52x7, Internal cable routing
MOSTEK KIEROWNICA	Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbare
CHWYTY SZTYCA	Onoff Diamond, 1lock-on, 135mm Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
SIODEŁKO HAMULCE	SDG BEL-AIR 3.0, LPU foam, steel rails KLAMKA: Sram G2 R, tool-free reach adjust ZACISK: Sram G2 R, 4-piston caliper, Centerline 200mm/180mm IS 6 bolts one-piece rotor, steel-backed organic pads
KOŁA	OBRĘCZ: DT Swiss E1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes SZPRYCHY: DT Competition, straightpull PIASTA PRZÓD: DT 370, Boost 15x110mm, IS 6 bolts / PIASTA TYŁ: DT 370, Boost 12x148mm, 18T Ratched LN system, IS 6

OPONA

MECHANIZM KORBOWY

SUPPORT

ŁAŃCUCH

TYLNA PRZERZUTKA

MANETKA

KASETA


WAGA

bolts
PRZÓD: Maxxis Minion DHF 29x2.5 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead / TYŁ: Maxxis Minion DHR II 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead
Truvativ Descendant 6K Eagle, Boost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm, 32T, steel, X-Sync 2
Sram DUB BSA, sealed bearings, 73mm
Sram NX Eagle, 12s, Powerlock
Sram Trigger NX Eagle, 12s, X-Actuation 1:1
Sram Trigger NX Eagle, 12s, X-Actuation 1:1
Sram XG-1230, 11-50T, 12s
14.5 kg

Produkt posiada dodatkowe opcje:

Rozmiar ramy: M (415mm) , L (445mm)

Geometria

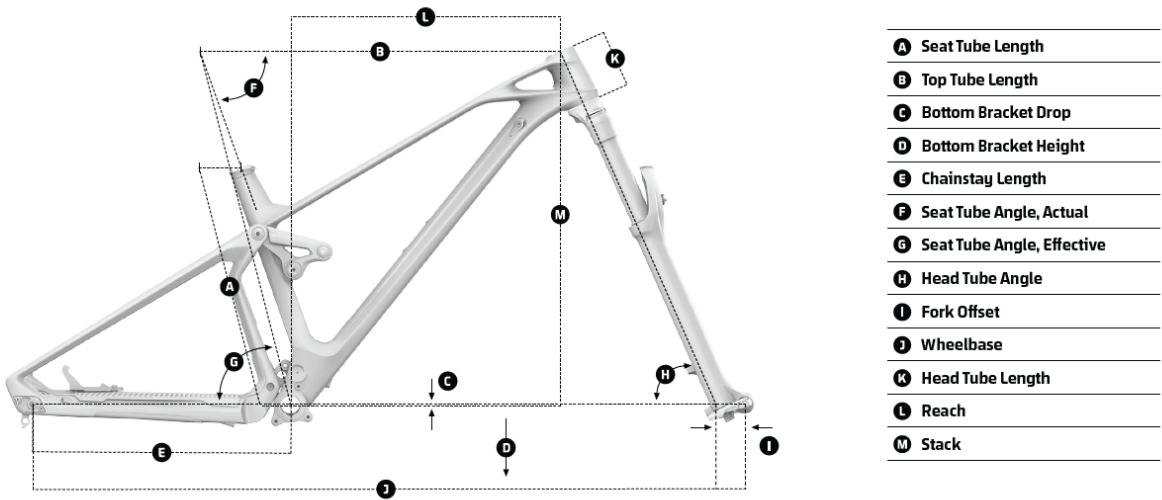

ENDURO
FOXY CARBON (STANDARD)

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B Top Tube Length	600 mm	620 mm	650 mm	670 mm
C Bottom Bracket Drop	-23	-23	-23	-23
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	70.5°	70.5°	70.5°	70.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65°	65°	65°	65°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1203 mm	1227 mm	1253 mm	1279 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	445 mm	465 mm	485 mm	505 mm
M Stack	615 mm	623 mm	637 mm	651 mm

ENDURO
FOXY CARBON (LOW)

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B Top Tube Length	600 mm	620 mm	650 mm	670 mm
C Bottom Bracket Drop	-28	-28	-28	-28
D Bottom Bracket Height	345 mm	345 mm	345 mm	345 mm
E Chainstay Legth	445 mm	445 mm	445 mm	445 mm
F Seat Tube Angle, Actual	70°	70°	70°	70°
G Seat Tube Angle, Effective	75.5°	75.5°	75.5°	75.5°
H Head Tube Angle	64.5°	64.5°	64.5°	64.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1210 mm	1233 mm	1260 mm	1286 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	440 mm	460 mm	480 mm	500 mm
M Stack	617 mm	627 mm	641 mm	656 mm