Dane aktualne na dzień: 08-11-2026 21:40

Link do produktu: https://skleprower.pl/rower-mondraker-foxy-carbon-r-29-2023-sram-1x12-fox-36-ethirten-p-594.html

ROWER MONDRAKER FOXY CARBON R 29 2023 SRAM 1x12 FOX 36 E*THIRTEN

Cena	**15 899,00 zł**
Cena poprzednia	~~**31 599,00 zł**~~
Dostępność	**Dostępny**
Czas wysyłki	**3 dni**
Producent	**MONDRAKER**
Kolekcja	**2023**
Rozmiar ramy	**M (415mm), L (445 mm), XL (500 mm)**

Opis produktu

FOXY CARBON R jest najbardziej ekonomicznym modelem z ramą karbonową, ale zachowuje dokładnie taką samą ramę jak modele XR i RR CARBON. Jest wyposażony w zawieszenie Fox, 160 mm z przodu i 150 mm z tyłu. Jest wyposażony w 12-biegową przekładnię SRAM NX Eagle, koła e*thirteen LG1 Plus Enduro, 4-tłokowe hamulce SRAM G2 R i komponenty ONOFF, z których ten ostatni podkreśla teleskopową sztycę Pija. Zestaw do zmiany geometrii jest opcjonalny w tym modelu.

RAMA	Foxy 29 Stealth Air full Carbon, Zero Suspension System, 150mm travel, Forward Geometry, aluminium CSC upper link with carbon bridge, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, HHG internal cable routing, Enduro MAX sealed bearings, shock mudguard, ISCG 05, custom frame protectors. *Optional Geometry Kit.
DAMPER	Fox Float-X LV Performance, 205x65mm. Settings: compression 2 positions lever, low-speed rebound, air preload. Trunnion top mount, 30x8mm bottom bushings
WIDELEC	Fox 36 29 Float Performance GRIP, 160mm, 3 Position, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: sweep adjust compression, low-speed rebound, air preload
STERY	Acros custom for 1-1/2" head tube, angular contact bearings 40x52x7, Internal cable routing
MOSTEK	ONOFF Sulfur FG 30mm 0º, 6061 forged alloy, 31.8mm barbore
KIEROWNICA	ONOFF Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9º backsweep, 5º upsweep, 31.8mm barbore
CHWYTY	ONOFF Desert, 1lock-on, 135mm
SZTYCA	Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
SIODEŁKO	SDG BEL-AIR 3.0, LPU foam, steel rails
HAMULCE	KLAMKA: Sram G2 R, tool-free reach adjust ZACISK: Sram G2 R, 4-piston caliper, Centerline 200mm/180mm IS 6 bolts one-piece rotor, steel-backed organic pads
KOŁA	OBRĘCZ: e*thirteen LG1 Enduro, IW30 Hookless, 6069 Welded Aluminum, 30mm internal width, tubeless ready, 28 spokes SZPRYCHY: e*thirteen custom Hive triple-butted black steel, alloy nipples, nipple washers PIASTA PRZÓD: e*thirteen Boost 15x110mm, triple-sealed, fully machined aluminum, IS 6 bolts / PIASTA TYŁ: e*thirteen Boost 12x148mm, triple-sealed, fully machined aluminum w/6-degree engagement, IS 6 bolts, Shimano freehub
OPONA	PRZÓD: Maxxis Minion DHF 29x2.5 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead / TYŁ: Maxxis Minion

	DHR II 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead
MECHANIZM KORBOWY	Truvativ Descendant 6K Eagle, Boost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm, 32T, steel, X-Sync 2
SUPORT	Sram DUB BSA, sealed bearings, 73mm
ŁAŃCUCH	Sram NX Eagle, 12s, Powerlock
TYLNA PRZERZUTKA	Sram NX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
MANETKA	Sram Trigger NX Eagle, 12s, X-Actuation 1:1
KASETA	Sram XG-1230, 11-50T, 12s
HAK	Sram UDH
WAGA	14.9 kg

Produkt posiada dodatkowe opcje:

Rozmiar ramy: M (41,5cm) , L (44,5cm) , XL (50cm)

Geometria

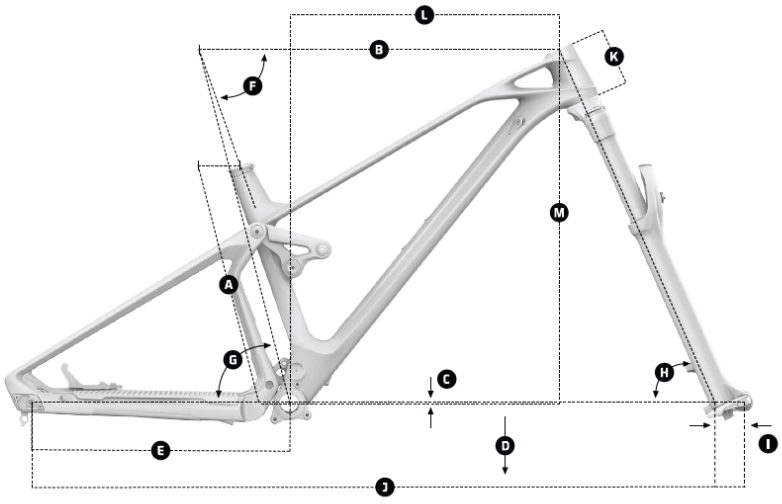

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

ENDURO

FOXY CARBON (STANDARD)

	Size	S	M	L	XL
A	Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B	Top Tube Length	600 mm	620 mm	650 mm	670 mm
C	Bottom Bracket Drop	-23	-23	-23	-23
D	Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E	Chainstay Legth	435 mm	435 mm	435 mm	435 mm
F	Seat Tube Angle, Actual	70.5°	70.5°	70.5°	70.5°
G	Seat Tube Angle, Effective	76°	76°	76°	76°
H	Head Tube Angle	65°	65°	65°	65°
I	Fork Offset	44 mm	44 mm	44 mm	44 mm
J	Wheelbase	1203 mm	1227 mm	1253 mm	1279 mm
K	Head Tube Length	90 mm	100 mm	115 mm	130 mm
L	Reach	445 mm	465 mm	485 mm	505 mm
M	Stack	615 mm	623 mm	637 mm	651 mm

ENDURO

FOXY CARBON (LOW)

	Size	S	M	L	XL
A	Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B	Top Tube Length	600 mm	620 mm	650 mm	670 mm
C	Bottom Bracket Drop	-28	-28	-28	-28
D	Bottom Bracket Height	345 mm	345 mm	345 mm	345 mm
E	Chainstay Legth	445 mm	445 mm	445 mm	445 mm
F	Seat Tube Angle, Actual	70°	70°	70°	70°
G	Seat Tube Angle, Effective	75.5°	75.5°	75.5°	75.5°
H	Head Tube Angle	64.5°	64.5°	64.5°	64.5°
I	Fork Offset	44 mm	44 mm	44 mm	44 mm
J	Wheelbase	1210 mm	1233 mm	1260 mm	1286 mm
K	Head Tube Length	90 mm	100 mm	115 mm	130 mm
L	Reach	440 mm	460 mm	480 mm	500 mm
M	Stack	617 mm	627 mm	641 mm	656 mm