

Link do produktu: <https://skleprower.pl/rower-mondraker-foxy-carbon-rr-29-2023-sram-1x12-hlins-p-495.html>



ROWER MONDRAKER FOXY CARBON RR 29 2023 SRAM 1x12 ÖHLINS

Cena	24 999,00 zł
Cena poprzednia	34 799,00 zł
Dostępność	Dostępny
Czas wysyłki	3 dni
Producent	MONDRAKER
Rozmiar ramy	L (445 mm)
Kolekcja	2023

Opis produktu

Fantastyczna efektywność pedałowania i niesamowita amortyzacja FOXY sprawiają, że jest to nasz najbardziej wszechstronny model. Podobnie jak XR, FOXY RR ma pneumatyczne zawieszenie Öhlins, ale ze skokiem 160 mm z przodu i 150 mm z tyłu; moc jest przekazywana przez układ napędowy SRAM GX/NX Eagle, podczas gdy koła e*thirteen LG1 Plus Enduro zapewniają płynność toczenia; Hamulce SRAM G2 RS zatrzymają Cię w mgnieniu oka, a komponenty ONOFF dokończą sprawę. Zestaw zmiennej geometrii dla tego modelu jest opcjonalny.

RAMA	Foxy 29 Stealth Air full Carbon, Zero Suspension System, 150mm travel, Forward Geometry, Carbon Monoblock upper link, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, HHG internal cable routing, Enduro MAX sealed bearings, shock mudguard, ISCG 05, custom frame protectors. *Geometry kit included
DAMPER	Öhlins TTX Air 205x65mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload. Trunnion top mount, 30x8mm bottom bushings
WIDELEC	Öhlins RXF 36 M.2 29, 160mm, TTX18 Twin Tube cartridge, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload, ramp chamber
STERY	Acros custom for 1-1/2" head tube, angular contact bearings 40x52x7, Internal cable routing
MOSTEK KIEROWNICA	Onoff Sulfur FG 30mm, 6061 forged alloy, 31.8mm barbore Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore
CHWYTY SZTYCA	Onoff Desert, 1lock-on, 135mm Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
SIODEŁKO	SDG BEL-AIR 3.0, LPU foam, steel rails
HAMULCE	KLAMKA: Sram Code R, tool-free reach adjust ZACISK: Sram Code R, oversized 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads
KOŁA	OBREĆCZ: e*thirteen LG1 Plus Enduro, IW30 Hookless, 6069 Welded Aluminum, 30mm internal width, tubeless ready, 28 spokes SZPRYCHY:DT e*thirteen custom Hive triple-buttet black steel, alloy nipples, nipple washers PIASTA PRZÓD: e*thirteen Boost 15x110mm, triple-sealed, fully machined aluminum, IS 6 bolts / PIASTA TYŁ: e*thirteen Boost 12x148mm, triple-sealed, fully machined aluminum w/6-degree engagement, IS 6 bolts, XD freehub

OPONA

MECHANIZM KORBOWY

SUPORT

ŁAŃCUCH

TYLNA PRZERZUTKA


MANETKA

KASETA

WAGA

PRZÓD: Maxxis Minion DHF 29x2.5 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead / TYŁ: Maxxis Minion DHR II 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead
Sram GX Eagle, Boost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm, 32T, CNC-machined alloy, X-SYNC 2
Sram DUB BSA, sealed bearings, 73mm
Sram NX Eagle, 12s, Powerlock
Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
Sram Trigger GX Eagle, 12s, X-Actuation 1:1
Sram XG-1275, 10-52T, 12s
14.5 kg

Geometria

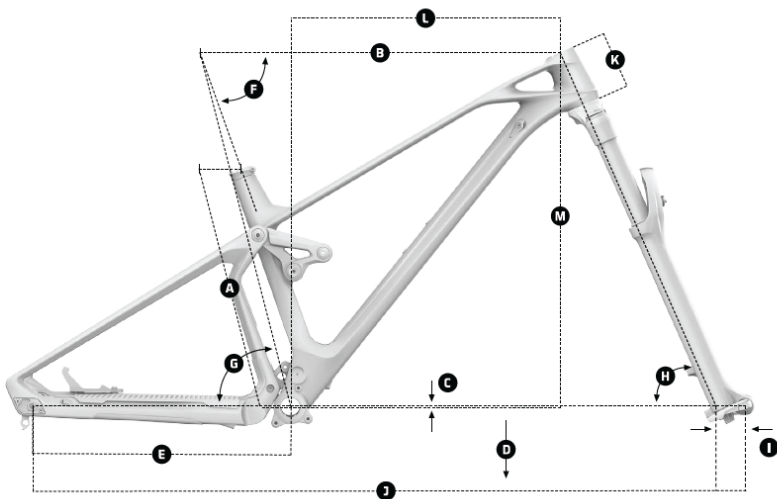

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

ENDURO
FOXY CARBON (STANDARD)

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B Top Tube Length	600 mm	620 mm	650 mm	670 mm
C Bottom Bracket Drop	-23	-23	-23	-23
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Length	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	70.5°	70.5°	70.5°	70.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65°	65°	65°	65°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1203 mm	1227 mm	1253 mm	1279 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	445 mm	465 mm	485 mm	505 mm
M Stack	615 mm	623 mm	637 mm	651 mm

ENDURO
FOXY CARBON (LOW)

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B Top Tube Length	600 mm	620 mm	650 mm	670 mm
C Bottom Bracket Drop	-28	-28	-28	-28
D Bottom Bracket Height	345 mm	345 mm	345 mm	345 mm
E Chainstay Length	445 mm	445 mm	445 mm	445 mm
F Seat Tube Angle, Actual	70°	70°	70°	70°
G Seat Tube Angle, Effective	75.5°	75.5°	75.5°	75.5°
H Head Tube Angle	64.5°	64.5°	64.5°	64.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1210 mm	1233 mm	1260 mm	1286 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	440 mm	460 mm	480 mm	500 mm
M Stack	617 mm	627 mm	641 mm	656 mm