

Link do produktu: <https://skleprower.pl/rower-mondraker-foxy-carbon-xr-29-2023-sram-1x12-hlins-p-602.html>



# ROWER MONDRAKER FOXY CARBON XR 29 2023 SRAM 1x12 ÖHLINS

|                 |              |
|-----------------|--------------|
| Cena            | 34 999,00 zł |
| Cena poprzednia | 49 999,00 zł |
| Dostępność      | Dostępny     |
| Czas wysyłki    | 3 dni        |
| Producent       | MONDRAKER    |
| Rozmiar ramy    | L (445 mm)   |
| Kolekcja        | 2023         |

## Opis produktu

W Mondraker rozwinęliśmy nasz najbardziej kultowy model, aby był bardziej „enduro” niż kiedykolwiek. FOXY XR to najbardziej radykalny ze wszystkich karbonowych modeli Foxy, ze skokiem przedniego koła 170 mm i tylnym 150 mm. Jest standardowo wyposażony w prestiżowe zawieszenie Öhlins z przodu i z tyłu (widelec RFX 36 i amortyzator TTX Air), bezprzewodowy układ napędowy SRAM X01 Eagle AXS, koła Race Carbon firmy e\*thirteen; 4-tłoczkowe hamulce SRAM G2 RSC i komponenty ONOFF z kierownicą Krypton Carbon 1.0. Co więcej, dla większego dostosowania właściwości jezdnych oferuje możliwość zmiany geometrii, a także jest dostępny z technologią MIND (tylko w UE).

|                      |                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RAMA                 | Foxy 29 Stealth Air full Carbon, Zero Suspension System, 150mm travel, Forward Geometry, Carbon Monoblock upper link, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, HHG internal cable routing, Enduro MAX sealed bearings, shock mudguard, ISCG 05, custom frame protectors.<br>*Geometry kit included                                                |
| DAMPER               | Öhlins TTX Air 205x65mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload. Trunnion top mount, 30x8mm bottom bushings                                                                                                                                                                                                                                       |
| WIDELEC              | Öhlins RFX 36 M.2 29, 170mm, TTX18 Twin Tube cartridge, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload, ramp chamber                                                                                                                                                                              |
| STERY                | Acros custom for 1-1/2" head tube, angular contact bearings 40x52x7, Internal cable routing                                                                                                                                                                                                                                                                                                                    |
| MOSTEK<br>KIEROWNICA | Onoff Krypton FG 30mm, CNC, 31.8mm barbore<br>Onoff Krypton Carbon 1.0, rise: 25mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore                                                                                                                                                                                                                                                                     |
| CHWYTY<br>SZTYCA     | ONOFF Desert, 1lock-on, 135mm<br>Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm                                                                                                                                                                                                                                                                      |
| SIODEŁKO             | SDG BEL-AIR 3.0, LPU foam, steel rails                                                                                                                                                                                                                                                                                                                                                                         |
| HAMULCE              | KLAMKA: Sram Code RSC, SwingLink and lever pivot bearings, tools-free reach and contact point adjust<br>ZACISK: Sram Code RSC, oversized 4-piston caliper, Centerline 200/180mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads                                                                                                                                                                   |
| KOŁA                 | OBREĆCZ: e*thirteen Race Carbon Enduro IW30, Hookless carbon rim, 30mm internal width, tubeless ready, 28 spokes<br>SZPRYCHY: e*thirteen custom Hive triple-buttressed black steel, alloy nipples, nipple washers<br>PIASTA PRZÓD: e*thirteen Boost 15x110mm, triple-sealed, fully machined aluminum, IS 6 bolts /<br>PIASTA TYŁ: e*thirteen Boost 12x148mm, triple-sealed, fully machined aluminum w/6-degree |

OPONA

MECHANIZM KORBOWY

SUPORT

ŁAŃCUCH

TYLNA PRZERZUTKA


MANETKA

KASETA

WAGA

engagement, IS 6 bolts, XD freehub  
PRZÓD: Maxxis Minion DHF 29x2.5 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead / TYŁ: Maxxis Minion DHR II 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead  
Sram X01 Carbon Eagle, Boost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm, 32T, CNC-machined alloy, X-SYNC 2  
Sram DUB BSA, sealed bearings, 73mm  
Sram GX Eagle, 12s, Powerlock  
Sram X01 Eagle AXS, roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1  
Sram Eagle AXS Rocker paddle, 12s  
Sram XG-1295, 10-52T, 12s  
13.9 kg

Geometria

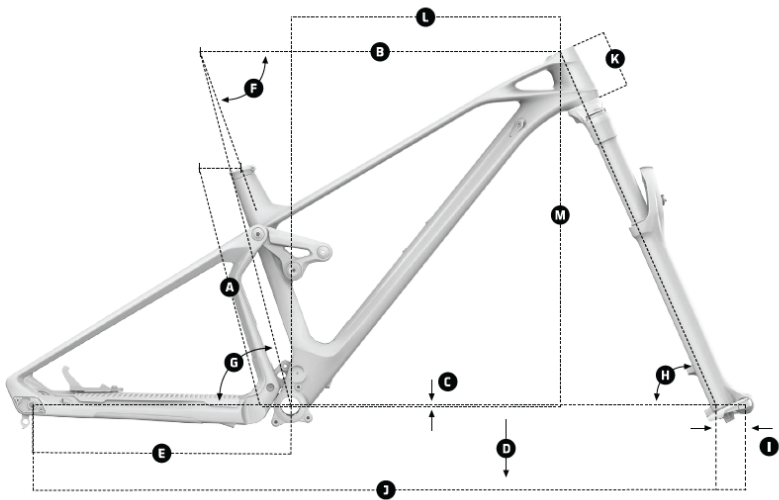

|   |                            |
|---|----------------------------|
| A | Seat Tube Length           |
| B | Top Tube Length            |
| C | Bottom Bracket Drop        |
| D | Bottom Bracket Height      |
| E | Chainstay Length           |
| F | Seat Tube Angle, Actual    |
| G | Seat Tube Angle, Effective |
| H | Head Tube Angle            |
| I | Fork Offset                |
| J | Wheelbase                  |
| K | Head Tube Length           |
| L | Reach                      |
| M | Stack                      |

ENDURO  
FOXY CARBON (STANDARD)

| Size                         | S       | M       | L       | XL      |
|------------------------------|---------|---------|---------|---------|
| A Seat Tube Length           | 375 mm  | 415 mm  | 445 mm  | 500 mm  |
| B Top Tube Length            | 600 mm  | 620 mm  | 650 mm  | 670 mm  |
| C Bottom Bracket Drop        | -23     | -23     | -23     | -23     |
| D Bottom Bracket Height      | 350 mm  | 350 mm  | 350 mm  | 350 mm  |
| E Chainstay Length           | 435 mm  | 435 mm  | 435 mm  | 435 mm  |
| F Seat Tube Angle, Actual    | 70.5°   | 70.5°   | 70.5°   | 70.5°   |
| G Seat Tube Angle, Effective | 76°     | 76°     | 76°     | 76°     |
| H Head Tube Angle            | 65°     | 65°     | 65°     | 65°     |
| I Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| J Wheelbase                  | 1203 mm | 1227 mm | 1253 mm | 1279 mm |
| K Head Tube Length           | 90 mm   | 100 mm  | 115 mm  | 130 mm  |
| L Reach                      | 445 mm  | 465 mm  | 485 mm  | 505 mm  |
| M Stack                      | 615 mm  | 623 mm  | 637 mm  | 651 mm  |

ENDURO  
FOXY CARBON (LOW)

| Size                         | S       | M       | L       | XL      |
|------------------------------|---------|---------|---------|---------|
| A Seat Tube Length           | 375 mm  | 415 mm  | 445 mm  | 500 mm  |
| B Top Tube Length            | 600 mm  | 620 mm  | 650 mm  | 670 mm  |
| C Bottom Bracket Drop        | -28     | -28     | -28     | -28     |
| D Bottom Bracket Height      | 345 mm  | 345 mm  | 345 mm  | 345 mm  |
| E Chainstay Length           | 445 mm  | 445 mm  | 445 mm  | 445 mm  |
| F Seat Tube Angle, Actual    | 70°     | 70°     | 70°     | 70°     |
| G Seat Tube Angle, Effective | 75.5°   | 75.5°   | 75.5°   | 75.5°   |
| H Head Tube Angle            | 64.5°   | 64.5°   | 64.5°   | 64.5°   |
| I Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| J Wheelbase                  | 1210 mm | 1233 mm | 1260 mm | 1286 mm |
| K Head Tube Length           | 90 mm   | 100 mm  | 115 mm  | 130 mm  |
| L Reach                      | 440 mm  | 460 mm  | 480 mm  | 500 mm  |
| M Stack                      | 617 mm  | 627 mm  | 641 mm  | 656 mm  |