

Link do produktu: <https://skleprower.pl/rower-mondraker-foxy-r-29-2023-sram-1x12-hlins-p-601.html>



ROWER MONDRAKER FOXY R 29 2023 SRAM 1x12 Öhlins

Cena	15 999,00 zł
Cena poprzednia	23 899,00 zł
Dostępność	Dostępny
Czas wysyłki	3 dni
Producent	MONDRAKER
Rozmiar ramy	S (38cm), M (42cm), L (47cm), XL (51cm)
Kolekcja	2023

Opis produktu

FOXY R jest wyposażony w aluminiową ramę 6061 ALLOY STEALTH EVO z hydroformowanymi rurami. Wykorzystuje nasz prestiżowy SYSTEM ZERO SUSPENSION, a także FORWARD GEOMETRY; stanowi to punkt odniesienia dla obecnie tworzonych na świecie rowerów enduro. Ma 160 mm skoku z przodu i 150 mm z tyłu, wykorzystuje widelec Öhlins TTX uzupełniony amortyzatorem TTX Air tej samej marki z tyłu. Wyróżnia się również 12-biegowym układem napędowym SRAM NX Eagle / SX Eagle, kołami e*thirteen LG1 Plus Enduro i jest uzupełniony hamulcami SRAM G2 i komponentami ONOFF.

RAMA	Foxy 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 150mm travel, Forward Geometry, one piece Monoblock upper link, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, telescopic seatpost internal routing, MAX capacity sealed bearings, ISCG 05
DAMPER	Öhlins TTX Air 205x62.5mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload.
WIDELEC	Trunnion top mount, 22.2x10mm bottom bushings
STERY	Öhlins RXF 36 M.2 29, 160mm, TTX18 Twin Tube cartridge, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload, ramp chamber
MOSTEK KIEROWNICA	ONOFF Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
CHWYTY SZTYCA	ONOFF Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare
SIODEŁKO HAMULCE	ONOFF Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbare
KOŁA	ONOFF Twin, 1lock-on, 135mm
OPONA	ONOFF Pija dropper internal, diameter 31.6mm, S size: 337x100mm, M size 387x125mm, L size: 425x150mm, XL size: 465x170mm
	SDG BEL-AIR 3.0, LPU foam, steel rails
	KLAMKA: Sram G2 R, SwingLink, tool-free reach adjust
	ZACISK: Sram G2 R, 4-piston caliper, Centerline 200mm/180mm IS 6 bolts one-piece rotor, steel-backed organic pads
	OBRĘCZ: e*thirteen LG1 Enduro, IW30 Hookless, 6069 Welded Aluminum, 30mm internal width, tubeless ready, 28 spokes
	SZPRYCHY: e*thirteen custom Hive triple-buttet black steel, alloy nipples, nipple washers
	PIASTA PRZÓD: e*thirteen Boost 15x110mm, triple-sealed, fully machined aluminum, IS 6 bolts / PIASTA TYŁ: e*thirteen Boost 12x148mm, triple-sealed, fully machined aluminum w/6-degree engagement, IS 6 bolts, Shimano freehub
	PRZÓD: Maxxis Minion DHF 29x2.5 WT, tubeless ready, 3C MAXX TERRA

MECHANIZM KORBOWY

SUPPORT
ŁAŃCUCH
TYLNA PRZERZUTKA


MANETKA
KASETA
WAGA

compound, EXO+ protection, 120TPI, folding bead / TYŁ: Maxxis Aggressor 29x2.3, tubeless ready, dual compound, Exo protection, 60TPI, folding bead
Sram SX Eagle, Boost, DUB axle, Direct Mount chain ring, S/M size: 170mm, L/XL size: 175mm, 32T, CNC-machined alloy, X-SYNC 2
SRAM DUB BSA, sealed bearings, 73mm
SRAM SX Eagle, 12s, Powerlock
SRAM NX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
SRAM Trigger SX Eagle, 12s, X-Actuation 1:1
SRAM XG-1230, 11-50T, 12s
15.7 kg

Produkt posiada dodatkowe opcje:

Rozmiar ramy: S (38cm) , M (42cm) , L (45cm) , XL (51cm)

Geometria

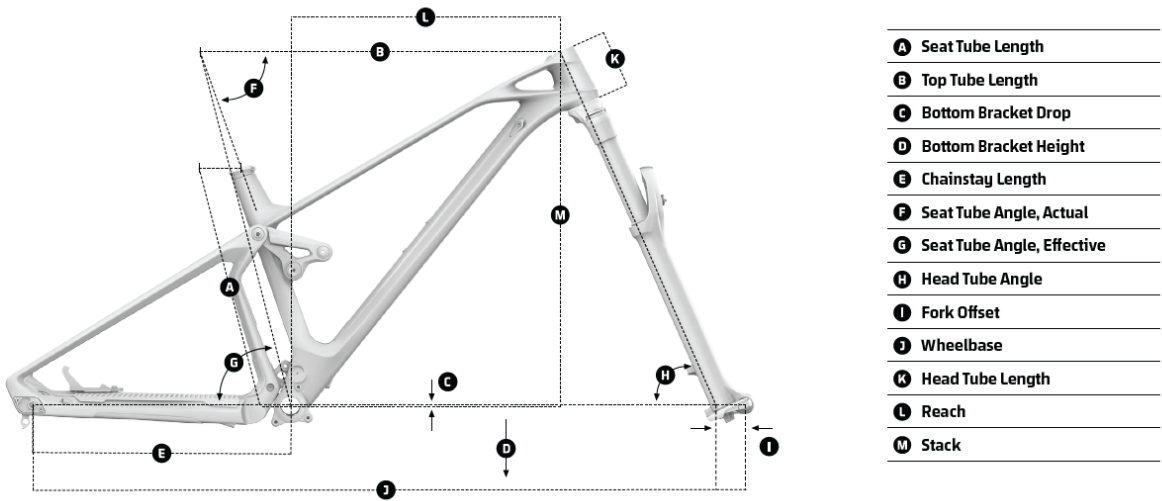

ENDURO FOXY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	470 mm	510 mm
B Top Tube Length	606 mm	629 mm	654 mm	678 mm
C Bottom Bracket Drop	-21 mm	-21 mm	-21 mm	-21 mm
D Bottom Bracket Height	355 mm	355 mm	355 mm	355 mm
E Chainstay Legth	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	71°	71°	71°	71°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	66°	66°	66°	66°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1193 mm	1222 mm	1248 mm	1274 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	450 mm	475 mm	495 mm	515 mm
M Stack	606 mm	615 mm	630 mm	643 mm