

Link do produktu: <https://skleprower.pl/rower-mondraker-raze-alu-2023-sram-1x12-rock-shox-35-p-628.html>



ROWER MONDRAKER RAZE ALU 2023 SRAM 1x12 ROCK SHOX 35

Cena	9 499,00 zł
Cena poprzednia	17 499,00 zł
Dostępność	Dostępny
Czas wysyłki	3 dni
Producent	MONDRAKER
Rozmiar ramy	S (37,5cm), M (41,5cm), L (44,5cm), XL (50cm)
Kolekcja	2023

Opis produktu

Idealny dla rowerzystów, którzy chcą roweru, który oferuje cały pakiet w rozsądnej cenie. RAZE to rower na szlaki, który oferuje najbardziej niesamowite osiągi w swojej kategorii dzięki ekskluzywnym technologiom Mondraker: ALLOY STEALTH EVO, FORWARD GEOMETRY i ZERO SUSPENSION SYSTEM, a wszystko to bez rozbijania banku. Wraz z innymi modelami z tej serii, zarówno karbonowymi, jak i aluminiowymi, RAZE opiera się na tej samej filozofii cieszenia się zarówno podczas wspinaczki jak i lotu w dół dzięki swoim bogatym możliwościom w obu aktywnościach. Ze 150 mm skoku z przodu i 130 mm z tyłu, będziesz zaskoczony, jak wszechstronny i przyjemny jest. To naprawdę rower do wszystkiego.

RAMA	Raze 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 130mm travel, Forward Geometry, one piece Monoblock upper link, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, telescopic seatpost internal routing, MAX capacity sealed bearings, ISCG 05
DAMPER	Fox Float DPS LV EVOL Performance, 205x57.5mm. Settings: rebound, 3-position compression adjustment (Open/Mid/Lock), air preload.
WIDELEC	Trunnion top mount, 25x8mm bottom bushings
STERY	RockShox 35 Gold 29 RL, 150mm, Solo Air, tapered steerer tube, Boost 15x110mm axle, 35mm steel stanchions, 44mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload
MOSTEK KIEROWNICA	Acros custom for 1-1/2" head tube, angular contact bearings 40x52x7, Internal cable routing
CHWYTY SZTYCA	Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore
SIODEŁKO HAMULCE	Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore
KOŁA	Onoff Diamond, 1lock-on, 135mm
OPONA	Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
	MDK series PU 2023
	KLAMKA: Sram Level T, Direct Link actuation, tooled reach adjust, lever pivot bushings ZACISK: Sram Level T, 2 piece caliper, Centerline 180mm
	IS 6 bolts one-piece rotor, steel-backed organic pad
	OBREĆCZ: MDK-EP1 29, 30mm internal width, tubeless ready, 32 spokes
	SZPRYCHY: CN round stainless steel PIASTA PRZÓD: IFormula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts / PIASTA TYŁ: Formula
	DHT148 Boost 12x148mm, sealed bearings, IS 6 bolts
	PRZÓD: Maxxis Dissector 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead / TYŁ: Maxxis
	Aggressor 29x2.3, tubeless ready, dual compound, Exo protection, 60TPI, folding bead

MECHANIZM KORBOWY

SUPPORT

ŁAŃCUCH

TYLNA PRZERZUTKA

MANETKA

KASETA

HAK


WAGA

Sram SX Eagle, Boost, DUB axle, Direct Mount chain ring, S/M size: 170mm, L/XL size: 175mm, 32T, steel, X-Sync 2
Sram DUB BSA, sealed bearings, 73mm
Sram SX Eagle, 12s, Powerlock
Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
Sram Trigger SX Eagle, 12s, X-Actuation 1:1
Sram PG-1210, 11-50T, 12s
Sram UDH
15.9 kg

Produkt posiada dodatkowe opcje:

Rozmiar ramy: S (37,5cm) , M (41,5cm) , L (44,5cm) , XL (50cm)

Geometria

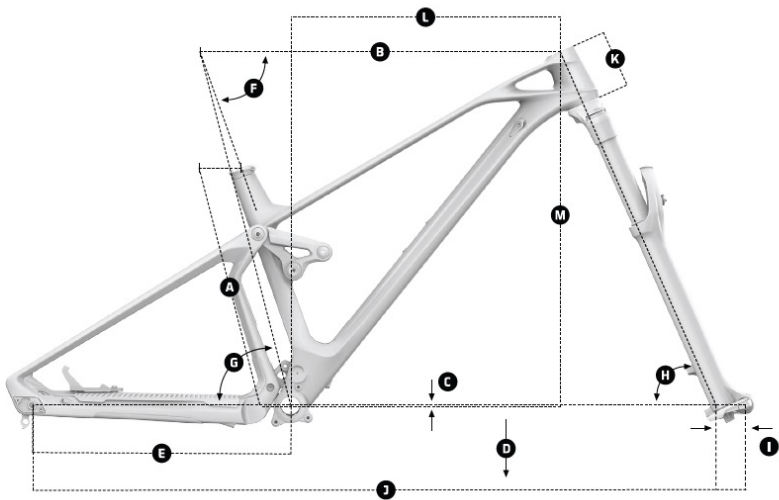

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

TRAIL RAZE

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B Top Tube Length	595 mm	620 mm	645 mm	670 mm
C Bottom Bracket Drop	-30	-30	-30	-30
D Bottom Bracket Height	343 mm	343 mm	343 mm	343 mm
E Chainstay Legth	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	71°	71°	71°	71°
G Seat Tube Angle, Effective	77°	77°	77°	77°
H Head Tube Angle	66°	66°	66°	66°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1193 mm	1217 mm	1243 mm	1269 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	608 mm	617 mm	631 mm	645 mm