

Link do produktu: <https://skleprower.pl/rower-mondraker-raze-alu-r-2023-sram-1x12-fox-36-p-623.html>

ROWER MONDRAKER RAZE ALU R 2023 SRAM 1x12 FOX 36



Cena	13 999,00 zł
Cena poprzednia	23 499,00 zł
Dostępność	Dostępny
Czas wysyłki	3 dni
Producent	MONDRAKER
Rozmiar ramy	M (41,5 cm), L (44,5cm), XL (50cm)
Kolekcja	2023

Opis produktu

Nowość na ten sezon, RAZE R ma te same cechy, co wersja CARBON, ale z ramą wykonaną ze stopu aluminium. Jest tak biegly we wspinaczce, że gdy nadejdzie czas na zjazd, będziesz oszołomiony poziomem amortyzacji i łatwością zarządzania nią. Zabawa jest po prostu jedną z największych zalet RAZE R. Ze 150 mm skoku z przodu i 130 mm z tyłu, RAZE R jest wyposażony w widelec Fox 36 Float połączony z amortyzatorem Fox Float; 12-biegowy układ napędowy SRAM GX/SRAM NX Eagle; Koła Mavic Crossmax XL; hamulce SRAM G2; i elementy ONOFF.

RAMA	Raze 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 130mm travel, Forward Geometry, one piece Monoblock upper link, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, telescopic seatpost internal routing, MAX capacity sealed bearings, ISCG 05
DAMPER	Fox Float DPS LV EVOL Performance, 205x57.5mm. Settings: rebound, 3-position compression adjustment (Open/Mid/Lock), air preload. Trunnion top mount, 25x8mm bottom bushings
WIDELEC	Fox 36 29 Float GRIP EVOL Performance, 150mm, tapered steerer tube, Boost 15x110mm axle, 44mm offset. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload
STERY	Acros custom for 1-1/2" head tube, angular contact bearings 40x52x7, Internal cable routing
MOSTEK KIEROWNICA	Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore
CHWYTY SZTYCA	Onoff Diamond, 1lock-on, 135mm Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm
SIODEŁKO HAMULCE	MDK series PU 2023 KLAMKA: Sram G2, SwingLink, tool-free reach adjust ZACISK: Sram G2 R, 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pads
KOŁA	OBRECZ: Mavic CrossMax XL S, 29 Boost 30mm internal width, hookless, tubeless ready, 24 spokes SZPRYCHY: 24 straight-pull double butted spokes PIASTA PRZÓD: Infinity hub, Boost 15x110mm, IS 6 bolts / PIASTA TYŁ: Infinity hub, ID360 freewheel technology, Boost 12x148mm, IS 6 bolts
OPONA	PRZÓD: Maxxis Dissector 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead / TYŁ: Maxxis Aggressor 29x2.3, tubeless ready, dual compound, Exo protection, 60TPI, folding bead
MECHANIZM KORBOWY	Truvativ Stylo 7k Eagle, Boost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm, 32T, CNC-machined alloy, X-SYNC 2
SUPORT	Sram DUB BSA, sealed bearings, 73mm

ŁAŃCUCH
TYLNA PRZERZUTKA


MANETKA
KASETA
HAK
WAGA

Sram NX Eagle, 12s, Powerlock
Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-
Actuation 1:1
Sram Trigger NX Eagle, 12s, X-Actuation 1:1
Sram XG-1230, 11-50T, 12s
Sram UDH
14.9 kg

Produkt posiada dodatkowe opcje:

Rozmiar ramy: M (41,5cm) , L (44,5cm) , XL (50cm)

Geometria

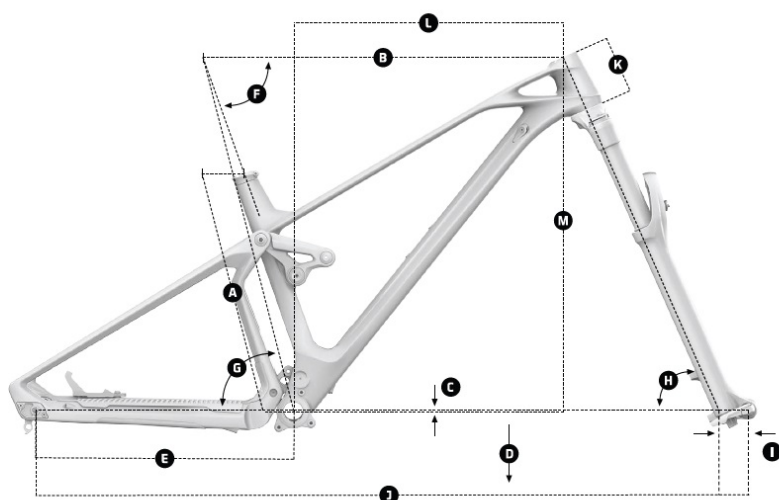

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

TRAIL RAZE

Size	S	M	L	XL
A Seat Tube Length	375 mm	415 mm	445 mm	500 mm
B Top Tube Length	595 mm	620 mm	645 mm	670 mm
C Bottom Bracket Drop	-30	-30	-30	-30
D Bottom Bracket Height	343 mm	343 mm	343 mm	343 mm
E Chainstay Legth	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	71°	71°	71°	71°
G Seat Tube Angle, Effective	77°	77°	77°	77°
H Head Tube Angle	66°	66°	66°	66°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1193 mm	1217 mm	1243 mm	1269 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	608 mm	617 mm	631 mm	645 mm