

Link do produktu: <https://skleprower.pl/rower-mondraker-superfoxy-29-2023-sram-1x12-fox-38-p-663.html>



ROWER MONDRAKER SUPERFOXY 29 2023 SRAM 1x12 FOX 38

Cena	12 999,00 zł
Cena poprzednia	19 699,00 zł
Dostępność	Dostępny
Czas wysyłki	3 dni
Producent	MONDRAKER
Rozmiar ramy	S (38cm), M (42cm), L (47cm), XL (51cm)
Kolekcja	2023

Opis produktu

Te najmłodsze „Dziecko” rodziny SUPERFOXY nie jest maluchem. Jego rama jest wykonana z ultraodpornego aluminium STEALTH ALLOY, ma nasz niezrównany system zawieszenia ZERO i GEOMETRIĘ FORWARD, które razem sprawiają, że jesteś po prostu nie do zatrzymania. Jego 170 mm skoku z przodu i 160 mm z tyłu sprawi, że poczujesz się bezpiecznie i pozwoli Ci w pełni cieszyć się najbardziej oszałamiającymi pojedynczymi torami na mapie. Co więcej, w modelu 2023 Superfoxy otrzymuje dostrojony widelec Fox 38 i amortyzator Fox Float X, aby rower błyszczał w każdej sytuacji również w socialach. Bycie najmniejszym z rodziny nie oznacza, że nie jest tak samo wydajny jak jego starszy starszy brat z włókna węglowego.


RAMA	SuperFoxy 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 160mm travel, Forward Geometry, one piece Monoblock upper link, SuperBoost 12x157mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, telescopic seatpost internal routing, Max. capacity sealed bearings, ISCG 05
DAMPER	Fox Float-X LV Performance, 205x65mm. Settings: compression 2 positions lever, low-speed rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings
WIDELEC	Fox 38 29 Float GRIP RHYTHM, 170mm, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload
STERY	ONOFF Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°
MOSTEK KIEROWNICA	ONOFF Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbare
CHWYTY SZTYCA	ONOFF Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbare
SIODEŁKO HAMULCE	ONOFF Diamond, 1lock-on, 135mm
	ONOFF Pija dropper internal, diameter 31.6mm, S size: 337x100mm, M size 387x125mm, L size: 425x150mm, XL size: 465x170mm
	SDG BEL-AIR 3.0, LPU foam, steel rails
	KLAMKA: Sram DB8, tool reach adjust ZACISK: Sram DB8, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
KOŁA	OBRĘCZ: e*thirteen LG1 Enduro, IW30 Hookless, 6069 Welded Aluminum, 30mm internal width, tubeless ready, 28 spokes SZPRYCHY: e*thirteen custom Hive triple-buttet black steel, alloy nipples, nipple washers PIASTA PRZÓD: e*thirteen Boost 15x110mm, triple-sealed, fully machined aluminum, IS 6 bolts/ PIASTA TYŁ: e*thirteen Superboost 12x157mm, triple-sealed, fully machined aluminum w/6-degree engagement, IS 6 bolts, Shimano freehub

OPONA	PRZÓD: Maxxis Assegai 29x2.5WT, tubeless ready, 3C MAXX GRIP compound, DH casing, 60x2TPI, folding bead / TYŁ: Maxxis Dissector 29x2.4WT, tubeless ready, 3C MAXX GRIP compound, DH casing, 60x2TPI, folding bead
MECHANIZM KORBOWY	Truvativ Descendant 7K Eagle, SuperBoost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm, 32T, CNC-machined alloy, X-SYNC 2
SUPPORT	SRAM DUB BSA, sealed bearings, 73mm
ŁAŃCUCH	SRAM SX Eagle, 12s, Powerlock
TYLNA PRZERZUTKA	SRAM SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
MANETKA	SRAM Trigger SX Eagle, 12s, X-Actuation 1:1
KASETA	SRAM PG-1210, 11-50T, 12s
WAGA	17.2 kg

Produkt posiada dodatkowe opcje:

Rozmiar ramy: S (38cm) , M (42cm) , L (47cm) , XL (51cm)

Geometria

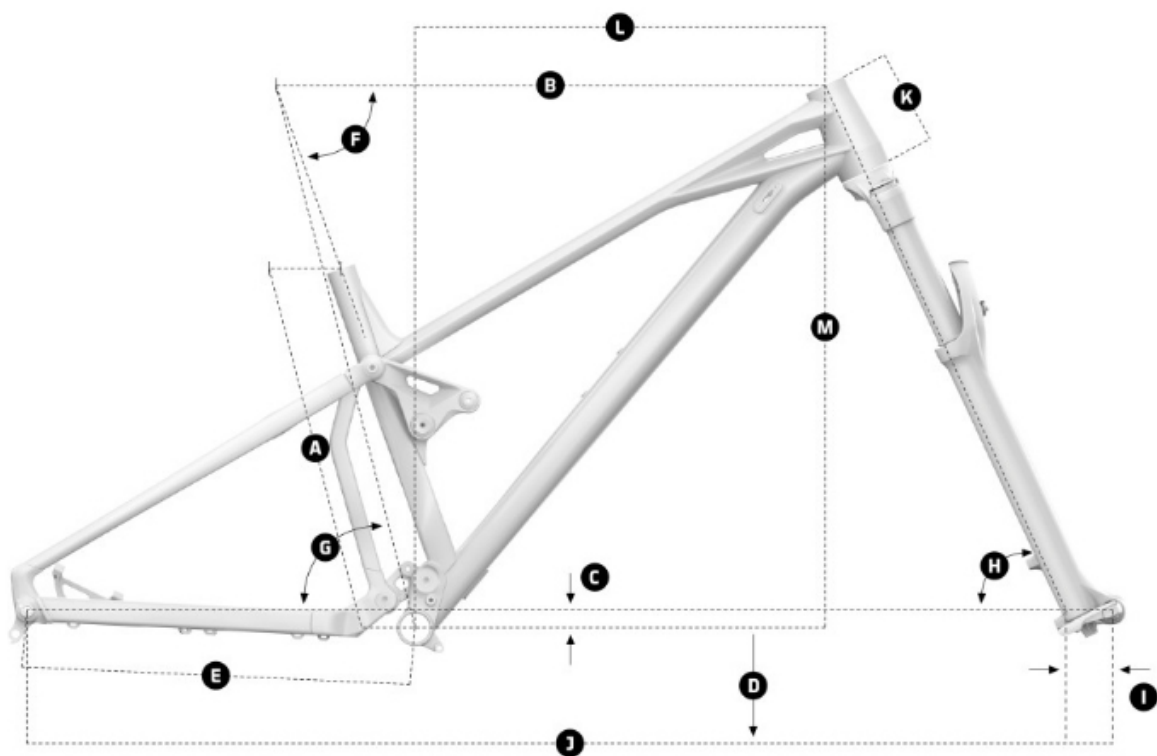

	FRAME SIZE	S	M	L	XL
A	Seattube length	380 mm	420 mm	470 mm	510 mm
B	Toptube length	605 mm	625 mm	650 mm	670 mm
C	Bottom bracket drop	-20 mm	-20 mm	-20 mm	-20 mm
D	Bottom bracket height	350 mm	350 mm	350 mm	350 mm
E	Chainstay length	445 mm	445 mm	445 mm	445 mm
F	Seat tube angle	71°	71°	71°	71°
G	Effective seattube angle	76°	76°	76°	76°
H	Headtube angle	65°	65°	65°	65°
I	Fork Offset	44 mm	44 mm	44 mm	44 mm
J	Wheelbase	1224 mm	1245 mm	1273 mm	1293 mm
K	Headtube length	100 mm	110mm	130 mm	130 mm
L	Reach	450 mm	470 mm	490 mm	510 mm
M	Stack	621 mm	621 mm	639 mm	639 mm

