Dane aktualne na dzień: 08-11-2026 20:58

Link do produktu: https://skleprower.pl/rower-mondraker-superfoxy-29-2025-sram-1x12-fox-38-p-1040.html

ROWER MONDRAKER SUPERFOXY 29 2025 SRAM 1x12 FOX 38

Cena	**12 999,00 zł**
Cena poprzednia	~~**19 550,00 zł**~~
Dostępność	**Dostępny**
Czas wysyłki	**3 dni**
Producent	**MONDRAKER**
Kolekcja	**2025**
Rozmiar ramy	**L (47cm)**

Opis produktu

Te najmłodsze „Dziecko” rodziny SUPERFOXY nie jest maluchem. Jego rama jest wykonana z ultraodpornego aluminium STEALTH ALLOY, ma nasz niezrównany system zawieszenia ZERO i GEOMETRIĘ FORWARD, które razem sprawiają, że jesteś po prostu nie do zatrzymania. Jego 170 mm skoku z przodu i 160 mm z tyłu sprawi, że poczujesz się bezpiecznie i pozwoli Ci w pełni cieszyć się najbardziej oszałamiającymi pojedynczymi torami na mapie. Co więcej, w modelu 2025 Superfoxy otrzymuje dostrojony widelec Fox 38 i sprężynę z tył, aby rower błyszczał w każdej sytuacji również w socialach.

RAMA	SuperFoxy 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 160mm travel, Forward Geometry, one piece Monoblock upper link, SuperBoost 12x157mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, telescopic seatpost internal routing, Max. capacity sealed bearings, ISCG 05
DAMPER	Fox DHX Performance, 205x65mm. Settings: 2P compression, low-speed rebound, spring preload. Trunnion top mount, 22,2x10mm bottom bushings, C40 compression, RL50 rebound, LMM, B40. Spring rate: S size 350 lbs, M size 400 lbs, L size 450 lbs, XL size 500 lbs
WIDELEC	Fox 38 29 Float RHYTHM 170mm, GRIP damper, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: 3 positions with micro adjust compression, rebound adjust, air preload
STERY	Onoff ZS44/ZS56, 1-1/8", 1.5" head tube, ACB sealed bearings, top 42x30x7x45ºx45º, bottom 52x40x8x45ºx45º
MOSTEK	Onoff S3 30mm 0º, 6061 forged alloy, 31.8mm barbore
KIEROWNICA	Onoff S3 1.0 6061 alloy, rise: 25mm, width: 800mm, 8º backsweep, 5º upsweep, 31.8mm barbore. L and XL size: 1.5 rise.
CHWYTY	Onoff Beehive, 1lock-on, 135mm
SZTYCA	Onoff Pija dropper internal, diameter 31.6mm, 1X Remote lever with bearing, S size: 140-115mm (388-235mm), M size: 160-135mm (428-255mm), L size: 180-155mm (468-275mm), XL size: 210-185mm (528-305mm)
SIODEŁKO	SDG BEL-AIR 3.0, LPU foam, steel rails
HAMULCE	KLAMKA: Sram DB8, tool reach adjust ZACISK: Sram DB8, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
KOŁA	OBRĘCZ: e*thirteen Grappler Core, IW30 Hookless, 6066 Welded Aluminum, 30mm internal width, tubeless ready, 28 spokes SZPRYCHY: e*thirteen custom Hive triple-butted black steel, alloy nipples, nipple washers PIASTA PRZÓD: e*thirteen Boost 15x110mm, triple-sealed, fully machined aluminum, IS 6 bolts/ PIASTA TYŁ: e*thirteen Superboost 12x157mm, triple-sealed, fully machined aluminum w/6-degree engagement, IS 6 bolts, Shimano freehub

OPONA	PRZÓD: Maxxis Assegai 29x2.5WT, tubeless ready, 3C MAXX GRIP compound, DH casing, 60x2TPI, folding bead / TYŁ: Maxxis Dissector 29x2.4WT, tubeless ready, 3C MAXX GRIP compound, DH casing, 60x2TPI, folding bead
MECHANIZM KORBOWY	Truvativ Descendant 7K Eagle, SuperBoost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm, 32T, CNC-machined alloy, X-SYNC 2
SUPORT	SRAM DUB BSA, sealed bearings, 73mm
ŁAŃCUCH	SRAM SX Eagle, 12s, Powerlock
TYLNA PRZERZUTKA	SRAM SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1
MANETKA	SRAM Trigger SX Eagle, 12s, X-Actuation 1:1
KASETA	SRAM PG-1210, 11-50T, 12s
WAGA	17.6 kg

Geometria

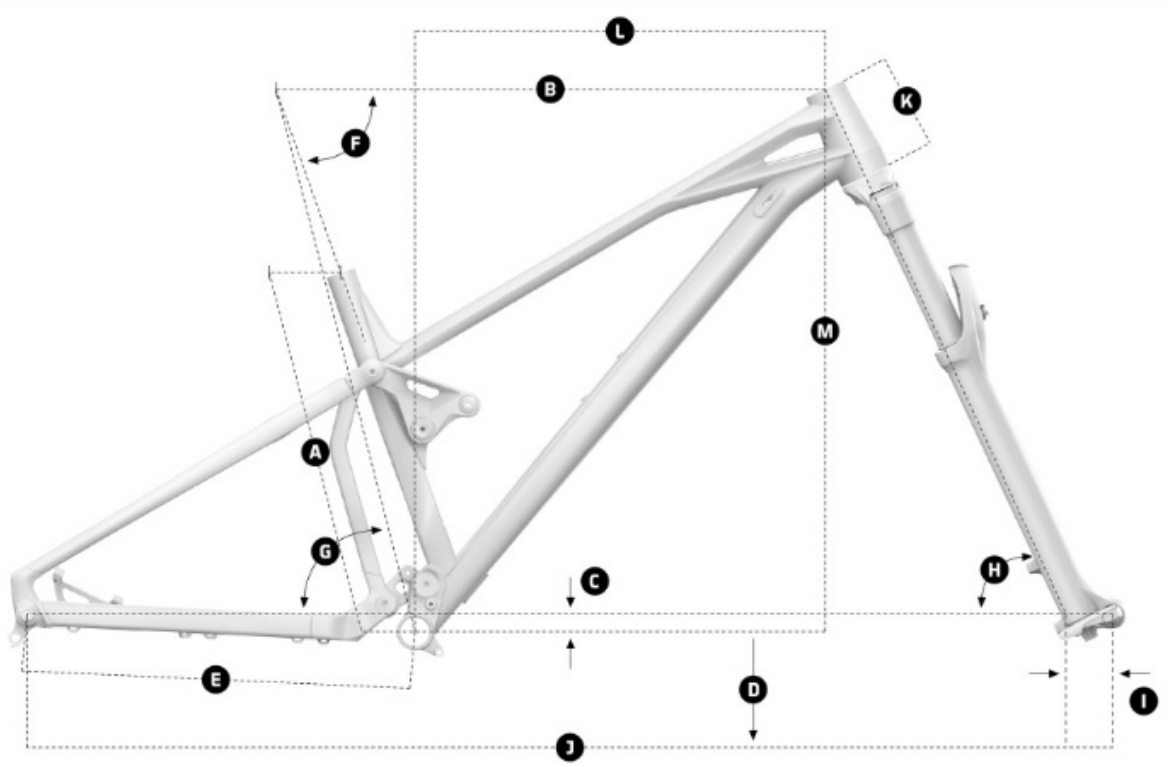

	FRAME SIZE	S	M	L	XL
A	Seattube length	380 mm	420 mm	470 mm	510 mm
B	Toptube length	605 mm	625 mm	650 mm	670 mm
C	Bottom bracket drop	-20 mm	-20 mm	-20 mm	-20 mm
D	Bottom bracket height	350 mm	350 mm	350 mm	350 mm
E	Chainstay length	445 mm	445 mm	445 mm	445 mm
F	Seat tube angle	71°	71°	71°	71°
G	Effective seattube angle	76°	76°	76°	76°
H	Headtube angle	65°	65°	65°	65°
I	Fork Offset	44 mm	44 mm	44 mm	44 mm
J	Wheelbase	1224 mm	1245 mm	1273 mm	1293 mm
K	Headtube length	100 mm	110mm	130 mm	130 mm
L	Reach	450 mm	470 mm	490 mm	510 mm
M	Stack	621 mm	621 mm	639 mm	639 mm