

Link do produktu: <https://skleprower.pl/rower-gt-force-29-comp-fox-shimano-deore-1x12-p-798.html>



Rower GT FORCE 29 COMP FOX SHIMANO DEORE 1x12

Cena	11 699,00 zł
Cena poprzednia	14 999,00 zł
Dostępność	Dostępny
Czas wysyłki	3 dni
Producent	GT
Rozmiar ramy	S (42cm), M (44cm), L (46cm), XL (48cm)
Kolekcja	2023

Opis produktu


Nic nie może się równać z poczuciem kontaktu z naturą, podkręcanego zapachem drzew i dźwiękiem opon zagłębiających się w miękkiej ściółce. Adrenalina wywołuje gęsią skórę, a prędkość wyciska łzy z oczu. Odkryj te chwile i więcej na rowerach GT z pełnym zawieszeniem

RAMA	Force Alloy 29" Frame, 150mm travel, BSA 73mm, LockR Pivots, Tapered Head Tube, Boost 12x148 Thru-Axle, 185x55mm Trunnion Shock Mount, ISCG05
DAMPER	Fox Float X Performance, 2-Pos Adj, 185x55mm Trunnion
WIDELEC	Fox Float Performance 38, 170mm, 15x110mm Boost, 44mm Offset
STERY	FSA No.42
MOSTEK	GT Alloy
KIEROWNICA	GT Alloy Riser Bar, 780mm, 30mm Rise
CHWYTY	Fabric Funguy
SZTYCA	GT Dropkick Dropper Post, 31.6, Internal Routing, 125mm (S, M), 150mm (L, XL)
SIODŁO	Fabric Scoop Shallow Sport
HAMULCE	Shimano MT420, 4-Piston, 203/180mm RT30 Rotors
KOŁA	OBREĆCZE: Stan's NoTubes Flow S2, 32h, Tubeless Ready SZPRYCHY: Stainless Steel, 14g PIASTY przód Shimano MT400B, 15x110mm, Centerlock tył Shimano MT410B, 12x148mm, Centerlock (F) Maxxis Minion DHF, 29 x 2.5", 3C MaxxTerra, EXO+ Casing, Tubeless Ready / (R) Maxxis Minion DHR II, 29 x 2.4", 3C MaxxTerra, EXO+ Casing, Tubeless Ready
OPONY	Shimano MT511, 32T
KORBY	Shimano BB52
SUPPORT	Shimano CN-M6100
ŁAŃCUCH	Shimano Deore M6100
PRZERZUTKA TYŁ	Shimano Deore M6100, 12-speed
MANETKA	Shimano Deore M6100, 10-51T
KASETA	

Produkt posiada dodatkowe opcje:

Rozmiar ramy: S (42cm) , M (44cm) , L (46cm) , XL (48cm)

Geometria

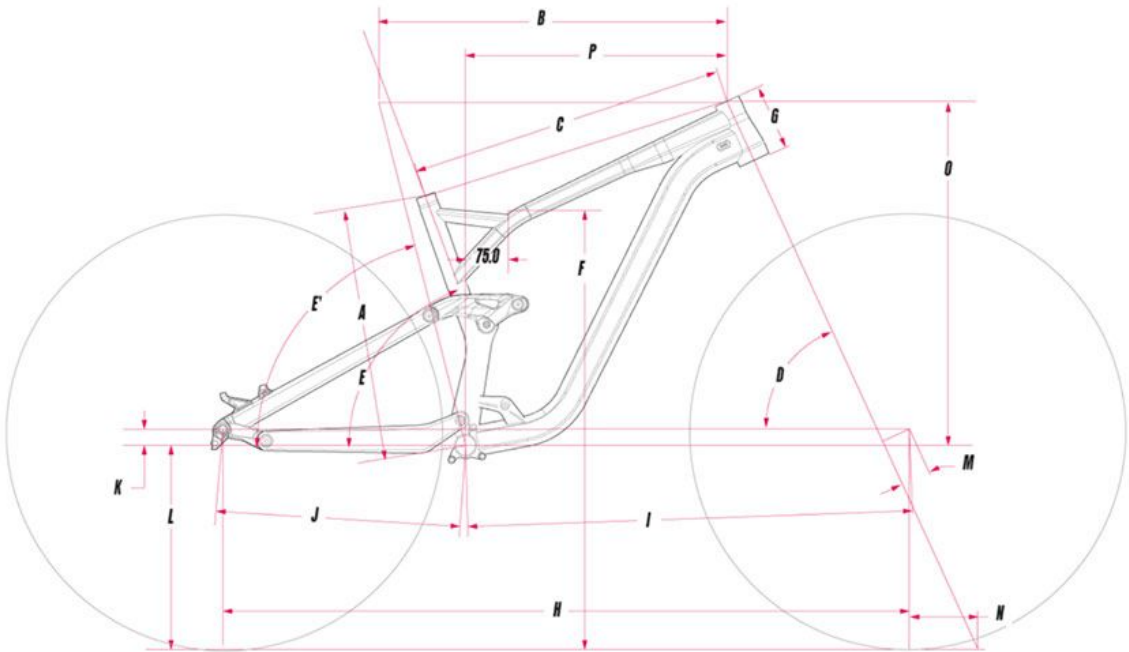

SIZES (MM)	S	M	L	XL
A Seat Tube Length	420	440	460	480
B Top Tube Horizontal	566	593	619	646
C Top Tube Actual	523	549	575	602
D Head Tube Angle	65°	65°	65°	65°
E Seat Tube Angle	77°	77°	77°	77°
F Standover	730	750	770	790
G Head Tube length	102	110	118	126
H Wheelbase	1193	1221	1250	1278
I Front Center	752	781	809	838
J Chainstay Length	442	442	442	442
K Bottom Bracket Drop	30	30	30	30
L Bottom Bracket Height	346	346	346	346
M Fork Rake	51	51	51	51
N Trail	119	119	119	119
O Stack	609	617	624	631
P Reach	425	450	475	500



Flip the chip into the **HIGH POSITION** and steepen the **HEAD ANGLE 0.5°**, raise the **BB 6MM**, and lengthen the **REACH 5MM**