

Link do produktu: <https://skleprower.pl/rower-gt-force-carbon-elite-le-29-rock-shox-zeb-ultimate-sram-x0-1x12-p-800.html>



Rower GT Force Carbon Elite LE 29 ROCK SHOX ZEB ULTIMATE SRAM X0 1X12

Cena	21 499,00 zł
Cena poprzednia	26 199,00 zł
Dostępność	Dostępny
Czas wysyłki	3 dni
Producent	GT
Rozmiar ramy	M (41cm), L (44,5cm), XL (50cm)
Kolekcja	2023

Opis produktu

Nic nie może się równać z poczuciem kontaktu z naturą, podkreśzanego zapachem drzew i dźwiękiem opon zagłębiających się w miękkiej ściółce. Adrenalina wywołuje gęsią skórę, a prędkość wyciska łzy z oczu. Odkryj te chwile i więcej na rowerach GT z pełnym zawieszeniem

RAMA

DAMPER
WIDELEC
STERY
MOSTEK
KIEROWNICA
CHWYTY
SZTYCA

SIODŁO
HAMULCE
KOŁA

OPONY


KORBY
SUPORT
ŁAŃCUCH
PRZERZUTKA TYŁ
MANETKA
KASETA

Force Carbon 29" Frame, High Pivot LTS Suspension, 160mm Travel, Tube in Tube Cable Routing, BSA 73mm, Boost 12 x 148mm Thru-Axle, 230x65 Shock, ISCG05
RockShox ZEB Ultimate, 170mm, 15x110mm Boost, 44mm Offset
RockShox Super Deluxe Ultimate, 230x65mm
FSA No. 57
GT Alloy
GT Alloy Riser Bar, 780mm, 30mm Rise
Fabric Funguy
GT Dropkick Dropper Post, 31.6, Internal Routing, 125mm (S, M), 150mm (L, XL)
Fabric Scoop Shallow Sport
SRAM Code RSC Hydro Disc, 220/200mm Centerline Rotors
OBREĆCZE: WTB KOM Trail i30, Tubeless ready SZPRYCHY: Stainless Steel, 14g PIASTY (F) Formula, 15x110mm / (R) SRAM MTH746, 12x148mm
(F) Maxxis Assegai, 29 x 2.5", Tubeless Ready / (R) Maxxis Minion DHR II, 29 x 2.4", Tubeless Ready
Truvativ Descendent 7K, Dub, 32t
SRAM DUB
SRAM GX Eagle, 12-speed
SRAM X01 Eagle
SRAM GX Eagle, 12-speed
SRAM XG-1275, 10-52T

Produkt posiada dodatkowe opcje:

Rozmiar ramy: M (41 cm) , L (44,5cm) , XL (50cm)

Geometria

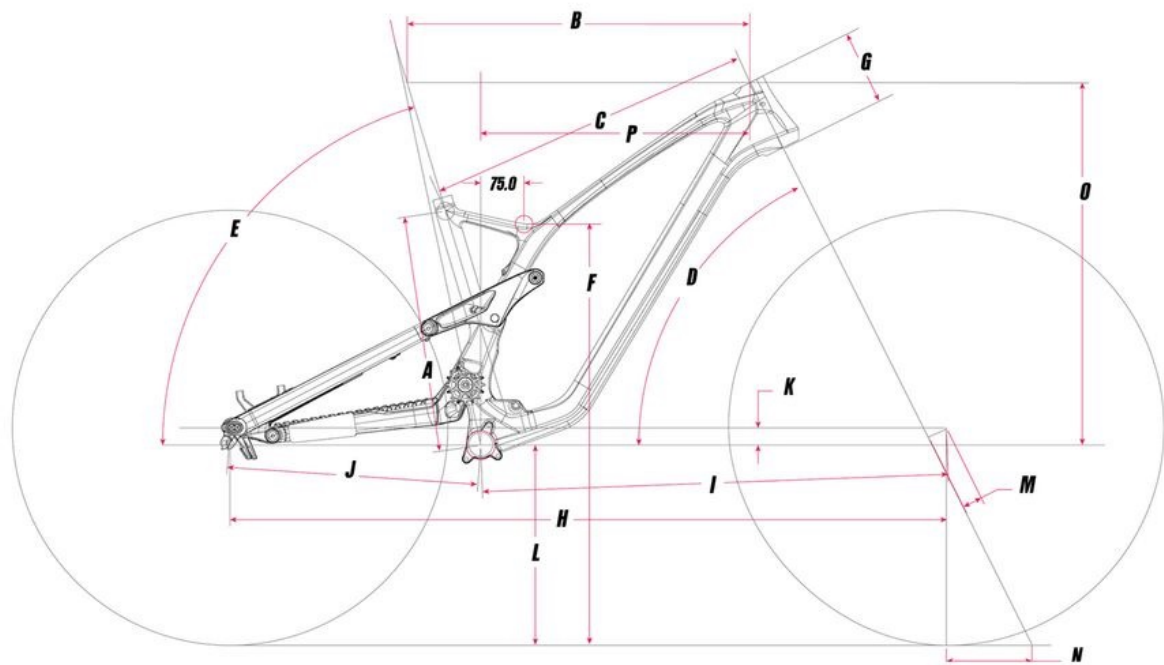

SIZES (MM)	S	M	L	XL
A Seat Tube Length	380	410	445	500
B Top Tube Horizontal	563	590	617	654
C Top Tube Actual	544	565	586	620
D Head Tube Angle	63.5°	63.5°	63.5°	63.5°
E Seat Tube Angle	78°	78°	78°	78°
F Standover	725	730	740	760
G Head Tube length	110	120	130	140
H Wheelbase	1211/1221	1240/1250	1270/1280	1309/1319
I Front Center	777.4	806.8	836.3	875.7
J Chainstay Length	435/445	435/445	435/445	435/445
K Bottom Bracket Drop	30	30	30	30
L Bottom Bracket Height	347	347	347	347
M Fork Rake	44	44	44	44
N Trail	139	139	139	139
O Stack	627	636	645	654
P Reach	430	455	480	515



Flip the chip to adjust the **CHAINSTAY LENGTH** between **435MM** and **445MM**
S/M assembled in **SHORT SETTING** / 435mm
L/XL assembled in **LONG SETTING** / 445mm
**Flip Chip adjustments*